

Ref:

ORL6009-HS-IP44-AW-9016-NL

Item No: ORL6009 – 13656

orlight[®]
FROM SOURCE TO SITE

The lamp is housed in a fixed position flush with the face of the ceiling. An outer retaining collar allows ease of location of the high specification luminaire. Ongoing lamp maintenance is achieved by removal of the centre body via magnetic lamp retention.



OPTICAL PERFORMANCE

LOR	95
-----	----

CONSTRUCTION


Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	14 MM
Cutout	80 MM
Weight	0.115KG
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

DIMENSIONS


ADDITIONAL DIMENSIONS

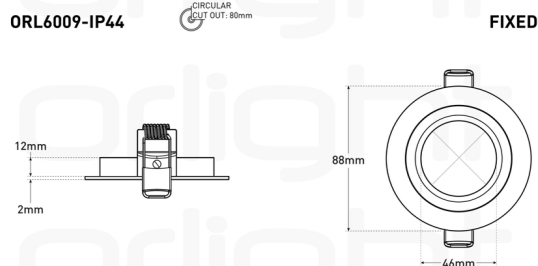

ORL6009-IP44 with **LED ENGINES**  **CIRCULAR CUT OUT: 80mm** **FIXED**
Allow +5mm for Cable Clearance

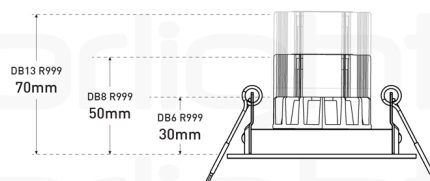

ORL6009-IP44 with **GU10 LAMPS**  **CIRCULAR CUT OUT: 80mm** **FIXED**
Allow +20mm for Cable Clearance



ORL6009-HS-IP44-AW-9016-NL

Item No: ORL6009 – 13656

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ACCESSORIES



MC1-SL-WL

11901

Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



ORL6009-COLLAR

13649

Retaining Downlight Collar for ORL6009/6019