

Ref:

ORLLED-SL-1230-35W-3K-9016-EM

Item No: PANEL-SL – 28680

orlight[®]
FROM SOURCE TO SITE


This 1195 x 295 LED panel offers a super slim 4mm trim, creating a near frameless light surface. White RAL-9016 finished Aluminium surrounded with quadraprism diffuser full V0 and UGR compliance. This luminaire can be recessed and suspended. Please Note: This product does not support hot plugging.



UGR
< 19

IP40

DIMENSIONS

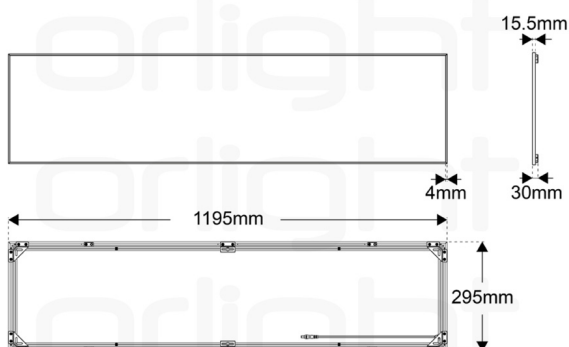

OPTICAL PERFORMANCE

Wattage	35W
Lumen Output	3850LM
Efficacy	110LM/W
CCT	3000K
CRI	CRI > 85
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	SAMSUNG LED
Chip Life	L70 > 54,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	900MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	1195 MM
Width / Depth	295 MM
Height	15.5 MM
Weight	4KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP40


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	330LM

ORLLED-SL-1230-35W-3K-9016-EM

Item No: PANEL-SL – 28680

LIGHT DISTRIBUTION



SUSPENSION KIT



SUS-KIT-PANEL-SCREW
17048
Suspension Kit Screws



SUS-KIT-M4-MALE
17042
M4 Angel Hanger