

Ref:

# ULTRA-4C-23W-WH-3K4K-DALI-B-EM

Item No: ULTRA CURVE – 35488

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE


Our Ultra Curve fixtures feature a slim design that seamlessly blends into any commercial space. These versatile fixtures can be surface mounted or suspended, offering flexible installation options. With switchable colour temperatures from 3000K to 4000K, they provide adaptable lighting solutions to suit various environments. Combining sleek aesthetics with functionality, Ultra Curve is the perfect choice for modern lighting needs.



SWITCHABLE  
CCT

IP44

## DIMENSIONS

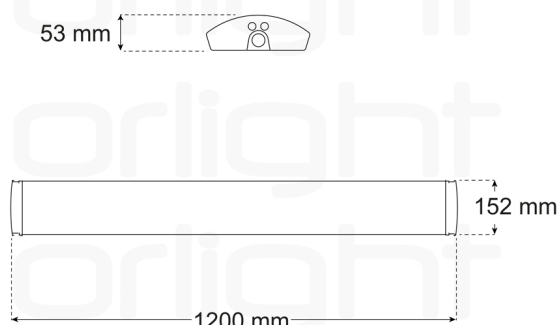

## OPTICAL PERFORMANCE

|                      |                   |
|----------------------|-------------------|
| Wattage              | 23W               |
| Lumen Output         | 3289LM / 3381LM   |
| Efficacy             | 143LM/W / 147LM/W |
| CCT                  | 3000K/4000K       |
| CRI                  | CRI > 80          |
| Binning              | 2 STEP MACADAMS   |
| Beam Angle           | 105°              |
| Chipset              | ORLIGHT LED       |
| Calculated Chip Life | L70 > 105,000HRS  |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 220-240V         |
| Milliamp / Current          | 200MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SURFACE       |
| Construction                  | ALUMINIUM     |
| Length                        | 1200 MM       |
| Width / Depth                 | 152 MM        |
| Height                        | 53 MM         |
| Weight                        | 2.05KG        |
| Finish                        | WHITE         |
| RAL                           | RAL 9003      |
| IP Rating                     | IP44          |
| IK Rating                     | IK07          |
| Operating Ambient Temperature | -20°C - +40°C |

## EMERGENCY


|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | INTEGRAL       |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 396LM / 406LM  |

# ULTRA-4C-23W-WH-3K4K-DALI-B-EM

Item No: ULTRA CURVE – 35488

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION

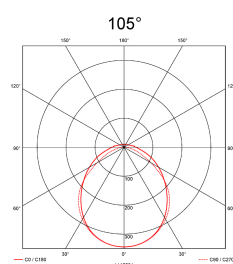

## ADDITIONAL PRODUCT IMAGES



## SUSPENSION KIT



### ULTRA-C-SUS-KIT-1M

41238

Ultra Suspension Kit