

Ref:

STEAMSPOT-FG-WH-9016-NL

Item No: STEAM – 17024

orlight[®]
FROM SOURCE TO SITE

The Steamspot fixture features minimalistic styling combined with IP65 construction. 72mm diameter for discreet installation. A frosted diffuser serves to minimise glare. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report [here](#). Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	78
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	72 MM
Height	30 MM
Cutout	65 MM
Weight	0.103KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

STEAMSPOT



FIXED

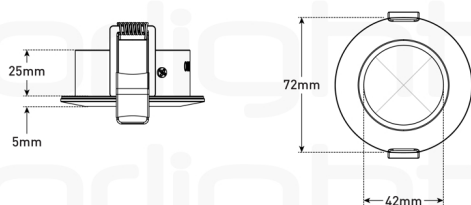


STEAMSPOT-FG-WH-9016-NL

Item No: STEAM – 17024

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

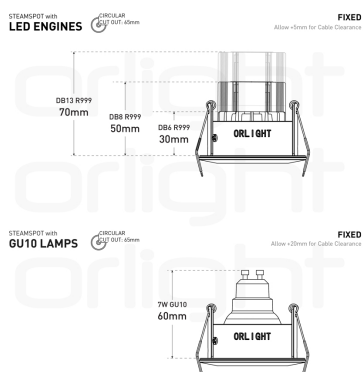

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

STEAMSPOT-FG-WH-9016-NL

Item No: STEAM – 17024

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-SL-WL
11901
Slim Spring Mains Converter for Orlight Classic,
Twist & Lock & Shower series.