

Ref:

FALCON-20W-BL-3K-DALI-B-EM


Item No: FALCON – 27398

orlight[®]
FROM SOURCE TO SITE

Exterior wall mounted bulkhead constructed to IP65 and IK10. Finished in Black RAL9005 or Anthracite RAL7016 with a clear diffuser. CRI >80 for light quality assurance.



DIMENSIONS

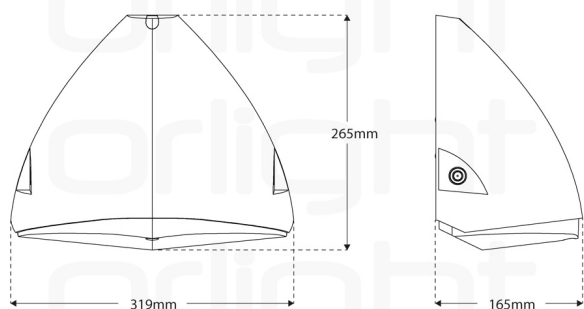

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2820LM
Efficacy	141LM/W
CCT	3000K
CRI	CRI > 83
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	SMD 2835
Chip Life	L70 > 60,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	500MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	WALL MOUNTED
Construction	ALUMINIUM
Length	319 MM
Width / Depth	165 MM
Height	265 MM
Weight	2.35KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK10
Operating Ambient Temperature	-20°C - +40°C


EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	423LM

FALCON-20W-BL-3K-DALI-B-EM

Item No: FALCON – 27398

LIGHT DISTRIBUTION



FIXING DETAILS

