

Ref:

# SIREN-9005-3000K


Item No: SIREN – 16773

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Switched exterior cylindrical ceiling light. White housing with a thick, partially frosted crystal glass diffuser creating a high level of visual comfort.



## DIMENSIONS

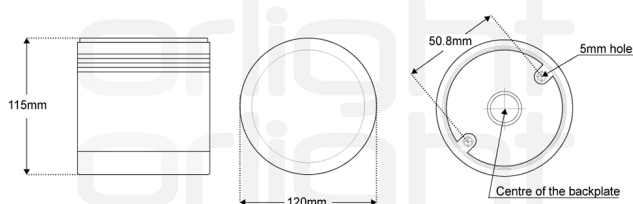

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 10W             |
| Lumen Output | 887LM           |
| Efficacy     | 88/LM/W         |
| CCT          | 3000K           |
| CRI          | CRI > 80        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 120°            |
| Chipset      | CREE COB LED    |
| Chip Life    | L70 > 55,400HRS |

## ELECTRICAL

|                      |            |
|----------------------|------------|
| Voltage              | AC200-240V |
| Driver Configuration | INTEGRAL   |
| Control              | SWITCHED   |

## CONSTRUCTION

|                               |                   |
|-------------------------------|-------------------|
| Installation                  | SURFACE MOUNTED   |
| Construction                  | ALUMINIUM & GLASS |
| Diameter                      | 120 MM            |
| Height                        | 115 MM            |
| Weight                        | 1.6KG             |
| Finish                        | BLACK             |
| RAL                           | RAL 9005          |
| IP Rating                     | IP54              |
| IK Rating                     | IK09              |
| Operating Ambient Temperature | -20°C - +40°C     |

## EMERGENCY

|                         |        |
|-------------------------|--------|
| Emergency Configuration | REMOTE |
|-------------------------|--------|

# SIREN-9005-3000K

Item No: SIREN – 16773

## LIGHT DISTRIBUTION

