

Ref:

ORLRPVALUHS-TP7-DIFF-CLR-2M

Item No: PROTRIM – 15323

orlight[®]
FROM SOURCE TO SITE


Only 7mm deep, this profile produces a wide spread of light within a minimal space with frosted diffuser to eliminate LED trail. Can be surface mounted or recessed. Aluminium construction for efficient heat dissipation. 3M foam adhesive for ease of installation. Optional adjustable tilt bracket available.



CONSTRUCTION

Installation	SURFACE / RECESSED
Construction	ALUMINIUM
Length	2000 MM
Width / Depth	16 MM
Height	7 MM
Finish	ALUMINIUM
IP Rating	IP20

DIMENSIONS

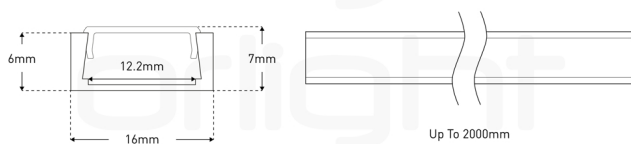

ORLRPVALUHS-TP7-DIFF-CLR-2M

Item No: PROTRIM – 15323

orlight[®]
FROM SOURCE TO SITE

EVO



24V EVO CRI90

EVO4



IP RATED

PROFILE



ORLRPVALUHS-CF-2M

15264
Coffer Profile

ACCESSORIES



ORLRPVALUHS-TP7-CLIP

31437
Mounting Clip



ORLRPVALUHS-TP7/TP12-TL-BRACKET

15325
Tilt Profile Bracket