


Ref:

QUADRA-170-WH-4000K-WS-EM


Item No: QUADRA – 16376

orlight[®]
FROM SOURCE TO SITE

This decorative square fixture features stainless steel construction and anti-glare glass diffuser. Fixture is rated to IP44 with an integral LED Driver. Please Note: This product does not support hot plugging.

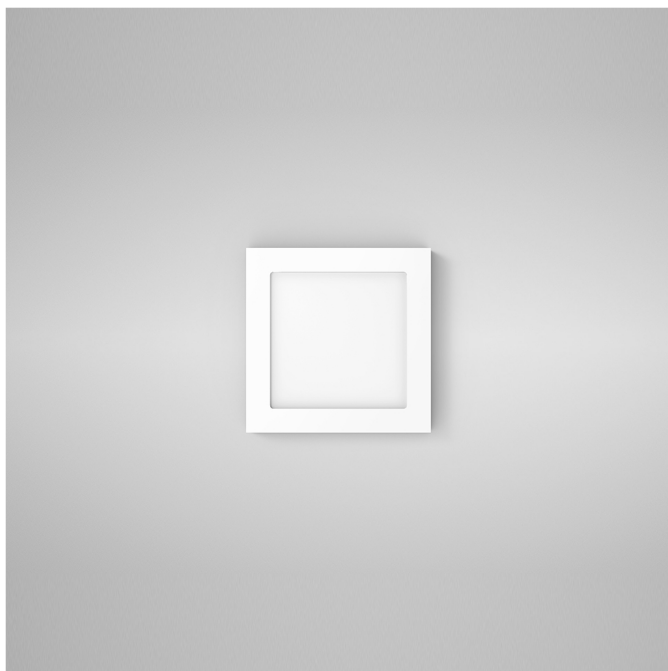

DIMENSIONS

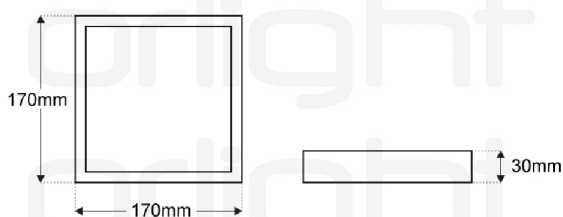

OPTICAL PERFORMANCE

Wattage	12W
Lumen Output	800LM
Efficacy	67LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	114°
Chipset	ORLIGHT LED

ELECTRICAL

Voltage	220-240V
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	STAINLESS STEEL
Length	170 MM
Width / Depth	30 MM
Height	170 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP44

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	200LM

QUADRA-170-WH-4000K-WS-EM


Item No: QUADRA – 16376

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

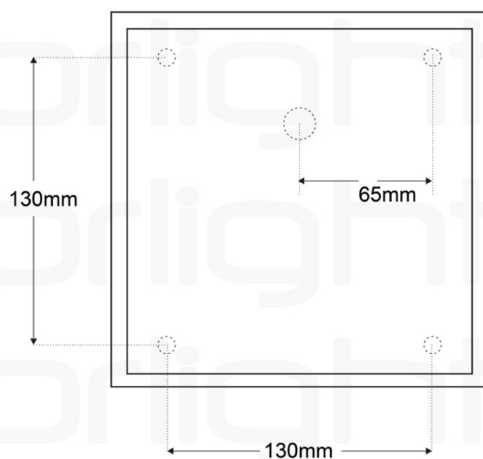

MAINS DRIVER



DOMINO-350MA-DR-DIM
21975
Switched & Mains Dimmable Driver

QUADRA-170-WH-4000K-WS-EM

Item No: QUADRA – 16376

orlight[®]
FROM SOURCE TO SITE

1-10V/DALI DRIVER



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver