

Ref:

VECTIV-DUO-51W-WH-4K-1125-DALI-B-EM

Item No: VECTIV – 42352

orlight[®]
FROM SOURCE TO SITE


Enhance your professional space with our advanced aluminium linear fixture in the suspended duo version. Featuring a state-of-the-art pod louvre design, it seamlessly integrates into your environment, providing both upward and downward lighting. With an integral driver for added convenience, this fixture delivers sleek and efficient illumination, setting a new standard for contemporary sophistication in professional settings. Configurations in excess of a standard single length, please refer to the length matrix here which provides options for lengths up to 15M.



UGR
< 19

IP20

DIMENSIONS

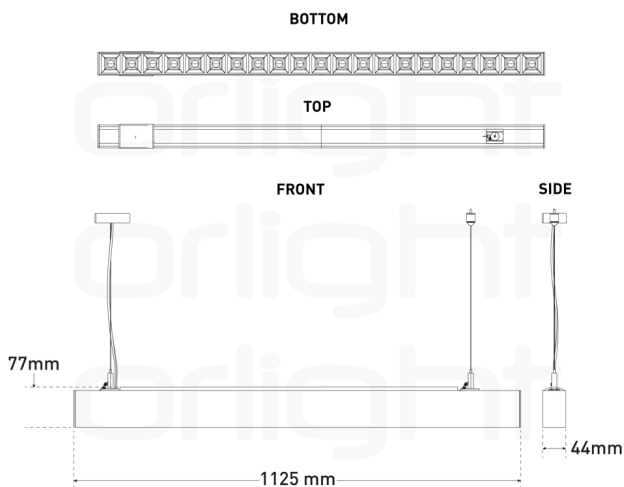

OPTICAL PERFORMANCE

Wattage	51W
Lumen Output	6018LM
Efficacy	118LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	80°
UGR	<19
Chipset	OSRAM 2835
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220V
Milliamp / Current	↓ 800MA ↑ 400MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SUSPENDED
Construction	ALUMINIUM
Length	1125 MM
Width / Depth	44 MM
Height	77 MM
Weight	3.1KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +60°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	252LM

VECTIV-DUO-51W-WH-4K-1125-DALI-B-EM

Item No: VECTIV – 42352

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



ADDITIONAL DIMENSIONS

