

Ref:

# ORLLM760-HS-SS-3000K


Item No: TELESO – 14988

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package. Marine Grade 316 Stainless Steel option with construction rated to IP67. A product footprint of 60mm diameter ensures versatile application. Inline driver options include switched, 1-10V, and DALI dimmable solutions. Please Note: This product does not support hot plugging.



## DIMENSIONS

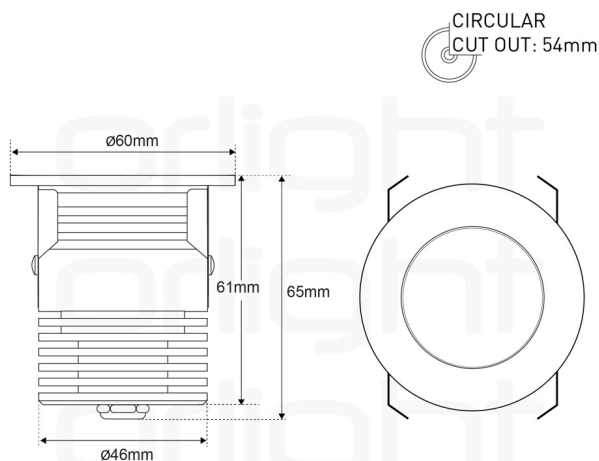

Cable Length: 1100mm

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 3.9W            |
| Lumen Output | 350LM           |
| Efficacy     | 90LM/W          |
| CCT          | 3000K           |
| CRI          | CRI > 90        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 20°             |
| Chipset      | CREE            |
| Chip Life    | L70 > 50,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 11.3V            |
| Milliamp / Current          | 350MA            |
| Driver Configuration        | REMOTE           |
| Cable Length                | 1100MM           |


## CONSTRUCTION

|                               |                 |
|-------------------------------|-----------------|
| Installation                  | RECESSED        |
| Construction                  | ALUMINIUM       |
| Diameter                      | 60 MM           |
| Width / Depth                 | 46 MM           |
| Height                        | 65 MM           |
| Cutout                        | 54 MM           |
| Weight                        | 0.35KG          |
| Tilt                          | FIXED           |
| Finish                        | STAINLESS STEEL |
| IP Rating                     | IP67            |
| IK Rating                     | IK07            |
| Operating Ambient Temperature | -20°C - +45°C   |

# ORLLM760-HS-SS-3000K

Item No: TELESO – 14988

## LIGHT DISTRIBUTION




## DRIVER CONFIGURATION

| CONTROL    | IP RATING | DRIVER                  | CODE  | MIN. FITTING | MAX. FITTING |
|------------|-----------|-------------------------|-------|--------------|--------------|
| Switched   | IP68      | ORLRPV350CC             | 15231 | 1            | 2            |
| Switched   | IP42      | ORLRPV350-35-APC        | 15230 | 3            | 8            |
| Switched   | IP66      | ORLRPV350-35-APC-IP66   | 31555 | 3            | 8            |
| Mains      | IP20      | ORLRPV20D-350MA         | 46595 | 1            | 3            |
| 1-10V/Push | IP20      | MAXDR-MINI-350MA        | 22251 | 1            | 4            |
| DALI       | IP20      | ORL-DALI-NFC-15CC-350MA | 34715 | 1            | 4            |

## PLEASE NOTE:

This product does not support hot plugging

## SWITCHED (IP42)



**ORLRPV350-35-APC**  
15230  
Constant current 350mA Driver

## SWITCHED (IP66)



**ORLRPV350-35-APC-IP66**  
31555  
Constant current 350mA Driver

# ORLLM760-HS-SS-3000K

Item No: TELESO – 14988

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

---

## SWITCHED (IP68)

---



### ORLRPV350CC

15231

Constant current 350mA Driver

---

## MAINS (IP20)

---



### ORLRPV20D-350MA

46595

Mains Dimmable Driver

---

## 1-10V/PUSH DIM (IP20)

---



### MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

---

## DALI (IP20)

---



### ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI Driver

# ORLLM760-HS-SS-3000K

Item No: TELESO – 14988

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## ACCESSORIES

---



### **ACCLMTS116**

10306

Inground Tube for LM760 Range