

Ref:

LUME-SPOT-MINI-4000K-45D


Item No: LUME SPOT – 41171

orlight[®]
FROM SOURCE TO SITE

The high-performance LUME Spot-Mini is built for durability, flexibility and visual comfort outdoors. IP67 rated, full protection against dust and powerful water jets; surface-mounted as standard or spike-mounted using an accessory. Choice of optics from narrow beams (accenting) to wide spreads (general illumination); robust tempered glass lens and corrosion-resistant anodised aluminium body. Supplied with a 45° lens and glare guard as standard; for an alternative lens, contact sales@orlight.com.



DIMENSIONS

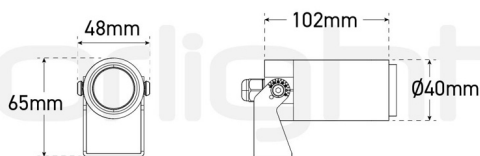

Cable Length: 1000mm

OPTICAL PERFORMANCE

Wattage	7W
Lumen Output	596LM
Efficacy	85LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	45°
Chipset	CREE
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	18V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	1000MM

CONSTRUCTION



Installation	SURFACE / SPIKE
Construction	ALUMINIUM
Diameter	40 MM
Length	102 MM
Width / Depth	48 MM
Height	65 MM
Weight	0.2KG
Tilt	ADJUSTABLE
Finish	BLACK
RAL	RAL 9005
IP Rating	IP67
IK Rating	IK08
Operating Ambient Temperature	-20°C - +50°C

LUME-SPOT-MINI-4000K-45D

Item No: LUME SPOT – 41171

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	1
Switched	IP42	ORLRPV350-35-APC	15230	2	5
Switched	IP66	ORLRPV350-35-APC-IP66	31555	2	5
Mains	IP20	ORLRPV20D-350MA	46595	1	2
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	2
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	1	2

SWITCHED (IP42)



ORLRPV350-35-APC

15230


Constant current 350mA Driver

LUME-SPOT-MINI-4000K-45D

Item No: LUME SPOT – 41171

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

SWITCHED (IP68)




ORLRPV350CC
15231
Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA
46595
Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA
22251
Mini 1-10V/DALI & Push Dimming Driver

LUME-SPOT-MINI-4000K-45D

Item No: LUME SPOT – 41171

orlight[®]
FROM SOURCE TO SITE

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver

ACCESSORIES



LUME-SPOT-SPIKE

41179

Earth Spike