

Ref:

ORLCL-TL-AW-9016


Item No: ORLCL – 14023

orlight[®]
FROM SOURCE TO SITE

Recessed adjustable architectural downlight, with aluminium construction and spring clip fixing mechanism. Recessed light source serves to minimise glare and incorporates a 20° tilt capability. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

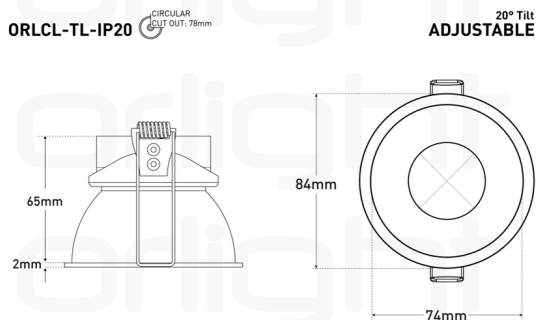


OPTICAL PERFORMANCE

LOR	86
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	84 MM
Height	67 MM
Cutout	78 MM
Weight	0.104KG
Tilt	20°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE

ADDITIONAL DIMENSIONS

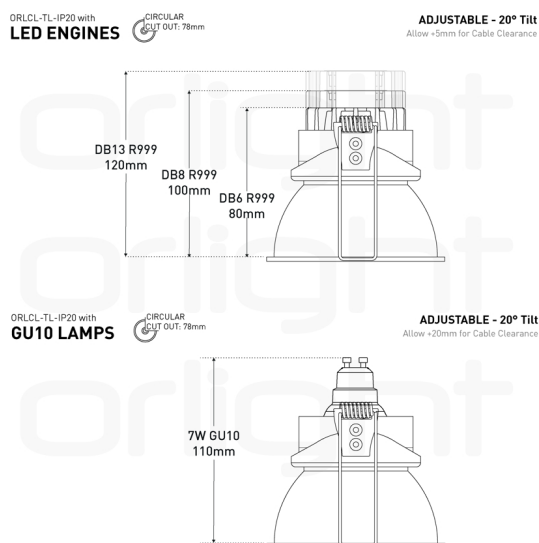

ORLCL-TL-AW-9016

Item No: ORLCL – 14023

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999


ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-WL
11905
Wired Mains Converter for Orlight Classic, Twist & Lock & Shower series



LOUVRE-HC
11753
Honeycomb Louvre