


Ref:

GRAFIK2-WH-2700K-EM

Item No: GRAFIK – 11258

orlight[®]
FROM SOURCE TO SITE


Orlight's Grafik range is a perfect combination of lens and reflectors. This recessed LED downlight is constructed from Aluminium, available in a variety of colour temperatures and CRI>90 provides light quality assurance. Finished in white with optional order only reflectors to suit your aesthetical requirements. Please Note: This product does not support hot plugging. Orlight does not recommend cutting of holes prior to receipt of product in hand.

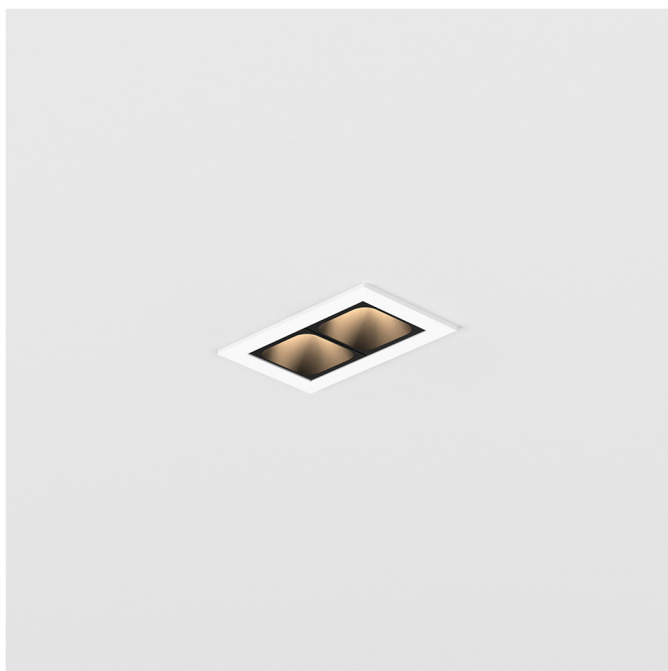

UGR
< 19

IP20

DIMENSIONS

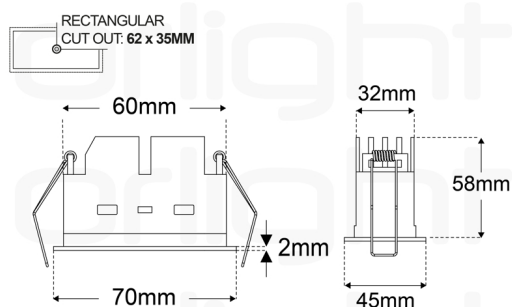

OPTICAL PERFORMANCE

Wattage	6W
Lumen Output	306LM
Efficacy	51LM/W
CCT	2700K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	40°
UGR	UGR < 19
Chipset	OSRAM LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	6.5V
Milliamp / Current	700MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	70 MM
Width / Depth	45 MM
Height	58 MM
Cutout	62 MM X 35 MM
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	154LM


GRAFIK2-WH-2700K-EM

Item No: GRAFIK – 11258


LIGHT DISTRIBUTION




COMPATIBLE REFLECTORS



GRAFIK2-RF-GL
11248
Grafik Pod Reflector



GRAFIK2-RF-MT
11249
Grafik Pod Reflector

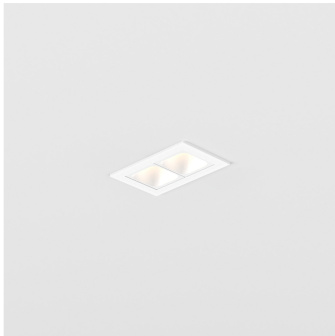

GRAFIK2-RF-WH
11250
Grafik Pod Reflector