

Ref:

ORL6009-HS-IP44-AW-9010-NL

Item No: ORL6009 – 22378

orlight
FROM SOURCE TO SITE

The lamp is housed in a fixed position flush with the face of the ceiling. An outer retaining collar allows ease of location of the high specification luminaire. Ongoing lamp maintenance is achieved by removal of the centre body via magnetic lamp retention.




DIMENSIONS

ORL6009-IP44

CIRCULAR
CUT OUT: 80mm

FIXED

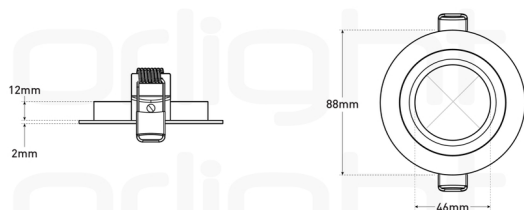

OPTICAL PERFORMANCE

LOR	95
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	14 MM
Cutout	80 MM
Weight	0.115KG
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9010
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


ADDITIONAL DIMENSIONS

ORL6009-IP44 with
LED ENGINES

CIRCULAR
CUT OUT: 80mm

FIXED

Allow +5mm for Cable Clearance

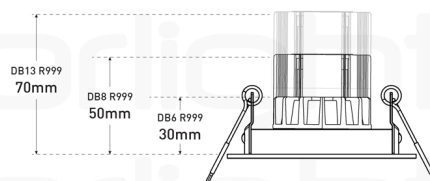


ORL6009-IP44 with
GU10 LAMPS

CIRCULAR
CUT OUT: 80mm

FIXED

Allow +20mm for Cable Clearance



ORL6009-HS-IP44-AW-9010-NL

Item No: ORL6009 – 22378

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ACCESSORIES



MC1-SL-WL

11901

Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



ORL6009-COLLAR

13649

Retaining Downlight Collar for ORL6009/6019