

Ref:

LUCIA350-SB-WH-3K4K-DALI-B-EM

Item No: LUCIA – 22309

orlight[®]
FROM SOURCE TO SITE


Architectural surface fixture constructed from Stainless Steel to IP54. Solid State chipset with downward light emission and wide beam distribution. Integral power supply unit available in switched, 1-10V and DALI dimmable configurations. Light quality assurance with CRI > 80. Please Note: This product does not support hot plugging.



SWITCHABLE
CCT

IP54

DIMENSIONS

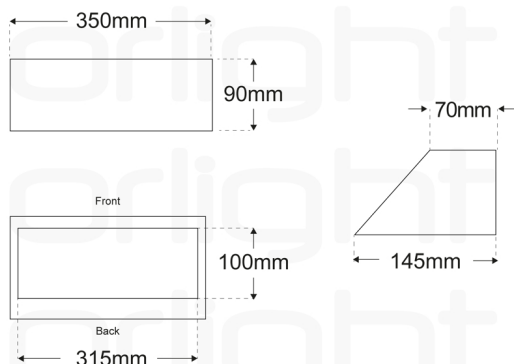

OPTICAL PERFORMANCE

Wattage	16W
Lumen Output	1030LM / 1078LM
Efficacy	64LM/W / 67LM/W
CCT	3000K/4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	110°
Chipset	SOLID STATE SMD
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	500MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	STAINLESS STEEL
Length	350 MM
Width / Depth	145 MM
Height	90 MM
Weight	2.159KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP54
Operating Ambient Temperature	-40°C - +55°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	206LM / 216LM

LUCIA350-SB-WH-3K4K-DALI-B-EM


Item No: LUCIA – 22309

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

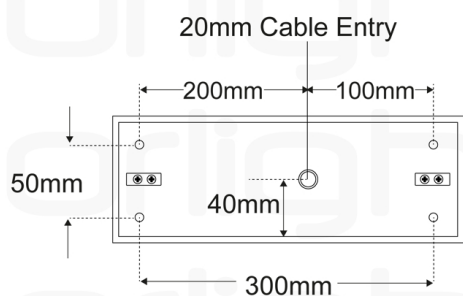

PLEASE NOTE:

This product does not support hot plugging