

Ref:

ORLLM96-HS-BL-3000K


Item No: TELESO – 15026

orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package and 30-degree beam options. Marine Grade 316 Stainless Steel option with construction rated to IP67. Bronze and Black RAL9011 finish options feature aluminium construction with Epoxy Powder coat rated to IP67. Product footprint of 96mm diameter ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.



DIMENSIONS

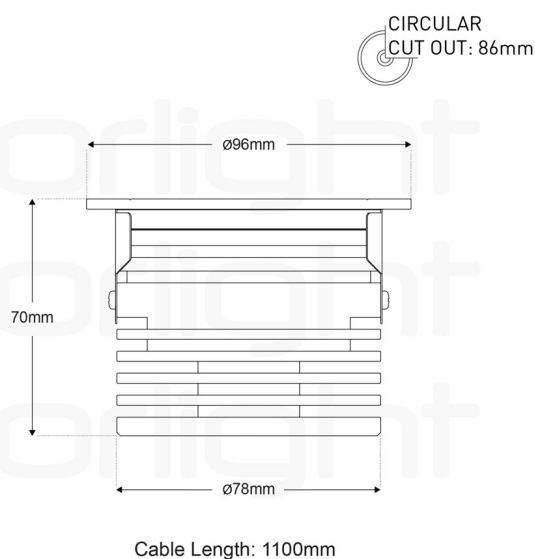

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	971LM
Efficacy	75LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	CREE
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	1100MM


CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	96 MM
Width / Depth	78 MM
Height	70 MM
Cutout	86 MM
Weight	0.87KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9011
IP Rating	IP67
IK Rating	IK08
Operating Ambient Temperature	-20°C - +45°C

ORLLM96-HS-BL-3000K

Item No: TELESO – 15026

LIGHT DISTRIBUTION




DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP42	ORLRPV350-35-APC	15230	1	2
Switched	IP66	ORLRPV350-35-APC-IP66	31555	1	2
Mains	IP20	ORLRPV20D-350MA	46595	1	1
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	1
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	1	1

PLEASE NOTE:


This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM96-HS-BL-3000K

Item No: TELESO – 15026

orlight[®]
FROM SOURCE TO SITE

MAINS (IP20)




ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI
Driver

ACCESSORIES



ACCLMTS168

10310

Inground Tube for LM96 Range