

Ref:

AXIAL-90-BL-IP20-10W-4K-DALI

Item No: AXIAL – 32565

orlight[®]
FROM SOURCE TO SITE


Solid-state IP20 surface mounted downlight, meticulously crafted to meet the highest standards of performance and versatility. This fixture is designed for indoor applications, providing an exceptional lighting solution with its sleek black matte finish and supplied with a remote driver. Effortlessly mountable with a BESA box, this downlight offers easy installation and flexibility. For outdoor settings, we also provide an IP65 option, delivering the same impeccable performance with enhanced durability.



UGR
< 19

IP20

DIMENSIONS

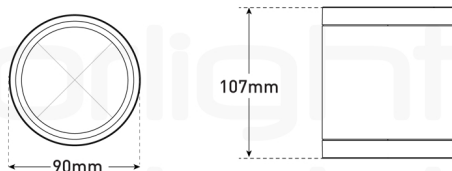

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	1018LM
Efficacy	102LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	36°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	200MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	90 MM
Height	107 MM
Weight	0.7KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


AXIAL-90-BL-IP20-10W-4K-DALI

Item No: AXIAL – 32565

orlight[®]

FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

