

Ref:

CAPELLA-BR-3000K


Item No: 10400

orlight[®]
FROM SOURCE TO SITE

Flat mounted pillar light is constructed from glass rods enclosed within two metal end caps and rated to IP44. Available in satin brass, chrome, bronze and black finishes. Ideal for adding light around mirrors or as additional lighting in a bathroom environment. Note: Remote driver supplied with fixture.



DIMENSIONS

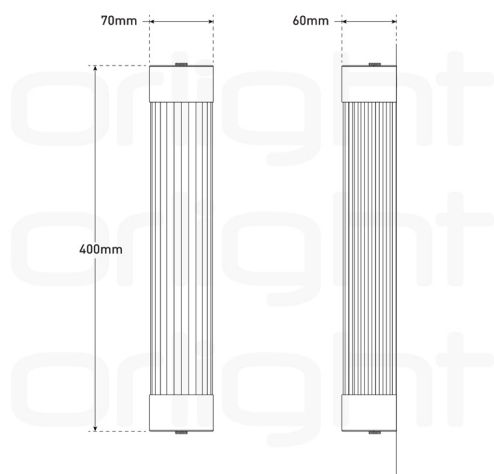

OPTICAL PERFORMANCE

Wattage	4W
Lumen Output	390LM
Efficacy	98LM/W
CCT	3000K
CRI	CRI > 80
Beam Angle	120°
Chipset	2835 LED
Chip Life	L70 > 54,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION


Installation	WALL MOUNTED
Construction	ALUMINIUM & GLASS
Length	70 MM
Width / Depth	60 MM
Height	397 MM
Weight	1.21KG
Finish	ANTIQUE BRONZE
IP Rating	IP44
Operating Ambient Temperature	-20°C ~ +50°C
Lamp Change	SOLID STATE LED

CAPELLA-BR-3000K

Item No: 10400

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

