

Ref:

RC-100-17W/M-WH-3K-1820-DALI


Item No: ORLINE-100 – 34362

orlight[®]
FROM SOURCE TO SITE

Orline-100 is an advanced recessed fixture for commercial settings, with a streamlined linear design and a width of 100mm. Low UGR of less than 16 for enhanced visual comfort. Choose from various lengths to customise your lighting solution. Supplied with an integral driver for simplified installation.



DIMENSIONS

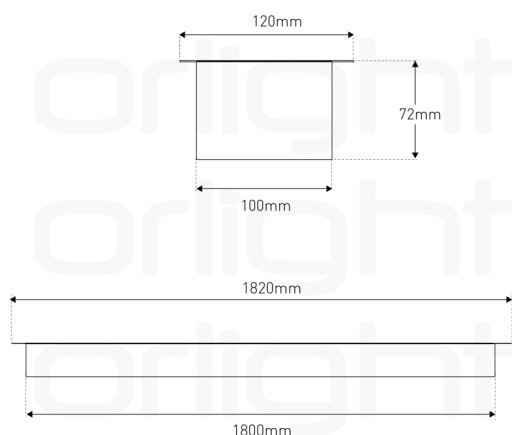

OPTICAL PERFORMANCE

Wattage	30W
Lumen Output	3900LM
Efficacy	130LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	<16
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	85V
Milliamp / Current	350MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	1820 MM
Width / Depth	120 MM
Height	72 MM
Cutout	1800 MM X 100 MM
Weight	5.2KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
IK Rating	IK06
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	INTEGRAL

RC-100-17W/M-WH-3K-1820-DALI

Item No: ORLINE-100 – 34362

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



ADDITIONAL DIMENSIONS

