

Ref:

ORLLEDBT-600-9016-4K-EM


Item No: ORLLEDBT – 14846

orlight[®]
FROM SOURCE TO SITE

Linear LED fitting featuring Aluminium construction finished in white RAL9016 and an opal diffuser. Integral LED driver with configurations to accommodate 1-10V, DALI and emergency options. This 2FT LED luminaire can be surface mounted or suspended depending on the desired application. Do not connect battery supply until 220/240V A.C. supply is permanently fed, and lamp fitted. Allow 24 hours charge before running lamp in emergency mode.



DIMENSIONS

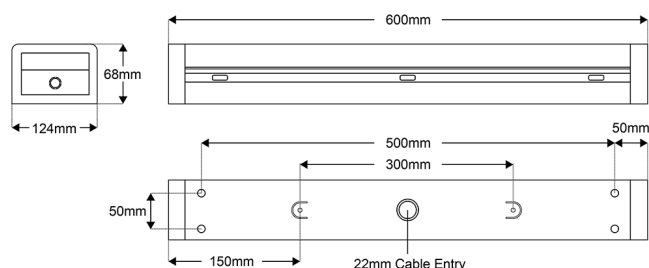

OPTICAL PERFORMANCE

Wattage	21W
Lumen Output	1953LM
Efficacy	93LM/W
CCT	4000K
CRI	CRI > 80
Beam Angle	120°
Chipset	SMD 2835 LED
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	500MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	600 MM
Width / Depth	124 MM
Height	68 MM
Weight	2KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +45°C


EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	292LM

ORLEDBT-600-9016-4K-EM

Item No: ORLEDBT – 14846

LIGHT DISTRIBUTION



SUSPENSION KIT



999-ORLALP018-R-SW
13781
Suspension Kit