

Ref:

SM60-25W-BL-3K-C90-1204-DALI-EM


Item No: ORLINE-60 – 37855

orlight
FROM SOURCE TO SITE

Online Surface uses a tongue-and-groove locking mechanism for seamless connection between multiple lengths, with designs from isolated modules to continuous lines or custom shapes. Integral control gear, multiple power outputs, CRI>90. Options: 17W/M and 25W/M (standard) at UGR<19, or 34W/M; output 3000K 2159-4318 lm/m, 4000K 2363-4726 lm/m depending on wattage. For configurations beyond a standard single length, refer to the length matrix for options up to 15M. For bespoke configurations, contact sales@orlight.com



DIMENSIONS

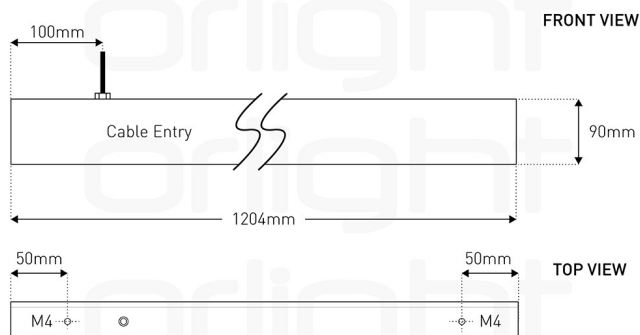

OPTICAL PERFORMANCE

Wattage	30.1W
Lumen Output	3823LM
Efficacy	127LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	90°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	110-240V
Milliamp / Current	300MA
Driver Configuration	INTEGRAL
Control	DALI-EM

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	1204 MM
Width / Depth	60MM
Height	90 MM
Diffuser	MICROPRISMATIC
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	381LM

SM60-25W-BL-3K-C90-1204-DALI-EM


Item No: ORLINE-60 – 37855

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



ADDITIONAL DIMENSIONS

