

Ref:

# ELIO-55-SUS-11W-WH-4K-DALI-B-EM


Item No: ELIO SUSPENDED – 32488

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

ELIO 55 is a high-performance suspended pendant, IP20 rated for reliable operation and protection. Available in black or white finish, with a high CRI for accurate colour rendering. Comes with a BESA mounting accessory and an integral driver (emergency remote), for quick, secure installation.



## DIMENSIONS

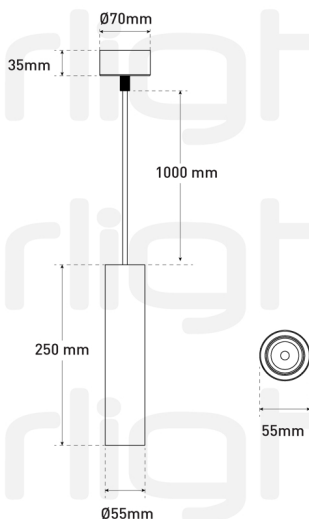

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 11W              |
| Lumen Output         | 1210LM           |
| Efficacy             | 110LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 90         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 20°              |
| UGR                  | UGR < 19         |
| Chipset              | BRIDGELUX        |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 36V              |
| Milliamp / Current          | 250MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |
| Cable Length                | 1000MM           |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SUSPENDED     |
| Construction                  | ALUMINIUM     |
| Diameter                      | 55 MM         |
| Height                        | 250 MM        |
| Tilt                          | FIXED         |
| Finish                        | WHITE         |
| RAL                           | RAL 9016      |
| IP Rating                     | IP20          |
| Operating Ambient Temperature | -20°C - +40°C |

## EMERGENCY

|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | REMOTE         |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 327LM          |

# ELIO-55-SUS-11W-WH-4K-DALI-B-EM

Item No: ELIO SUSPENDED – 32488

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION

