

Ref:

# NEBULADQ-150-SUS-13W-BL-4K-DALI


Item No: NEBULA SUSPENDED – 32083

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

NEBULADQ-SUS-150 is a high-performance UGR<19 suspended LED downlight, engineered from durable aluminium to deliver uniform downward light distribution. With a high lumen output and CRI >85, it ensures excellent visual clarity and light quality across commercial and architectural applications. The product is supplied with a 30° optic as standard. 60° optic available to order. Emergency option available. Please note: the driver and emergency inverter are remote to the fitting.



## DIMENSIONS

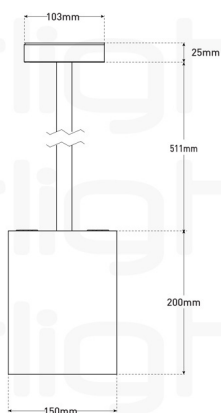

## OPTICAL PERFORMANCE

|                      |                     |
|----------------------|---------------------|
| Wattage              | 13W                 |
| Lumen Output         | 1651LM              |
| Efficacy             | 127LM/W             |
| CCT                  | 4000K               |
| CRI                  | CRI > 85            |
| Binning              | 2 STEP MACADAMS     |
| Beam Angle           | 30° / 60°           |
| UGR                  | UGR < 19            |
| Chipset              | CITIZEN LED CHIPSET |
| Calculated Chip Life | L70 > 105,000HRS    |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 36V              |
| Milliamp / Current          | 300MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SUSPENDED     |
| Construction                  | ALUMINIUM     |
| Diameter                      | 150 MM        |
| Height                        | 200 MM        |
| Weight                        | 2.8KG         |
| Tilt                          | FIXED         |
| Finish                        | BLACK         |
| RAL                           | RAL 9005      |
| IP Rating                     | IP20          |
| Operating Ambient Temperature | -20°C - +35°C |

## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | REMOTE    |

# NEBULADQ-150-SUS-13W-BL-4K-DALI

Item No: NEBULA SUSPENDED – 32083



## LIGHT DISTRIBUTION

