

Ref:

LUMINO-DOME-25W-1M-BL-3K-4K

Item No: LUMINO – 28885

orlight[®]
FROM SOURCE TO SITE


Ground-mounted exterior bollard constructed from die-cast aluminium. Rated to IP65 and available in 3000k or 4000k.



SWITCHABLE
CCT

IP65

DIMENSIONS

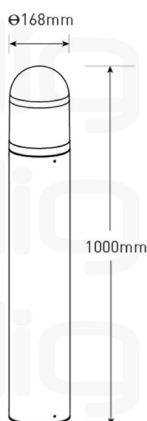

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	2250LM / 2400LM
Efficacy	90LM/W / 96LM/W
CCT	3000K/4000K
CRI	CRI > 80
Chipset	2835 LED

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	100-240V
Milliamp / Current	600MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION


Installation	SURFACE / ROOT
Construction	ALUMINIUM
Diameter	168 MM
Height	1000 MM
Weight	5.75KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK09

LUMINO-DOME-25W-1M-BL-3K-4K

Item No: LUMINO – 28885

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ROOT MOUNT KIT



LUMINO-ROOT-MOUNT-KIT
28884
Root Mount Kit