

Ref:

# RC-100-17W/M-WH-4K-1520-DALI


Item No: ORLINE-100 – 34356

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Orline-100 is an advanced recessed fixture for commercial settings, with a streamlined linear design and a width of 100mm. Low UGR of less than 16 for enhanced visual comfort. Choose from various lengths to customise your lighting solution. Supplied with an integral driver for simplified installation.



## DIMENSIONS

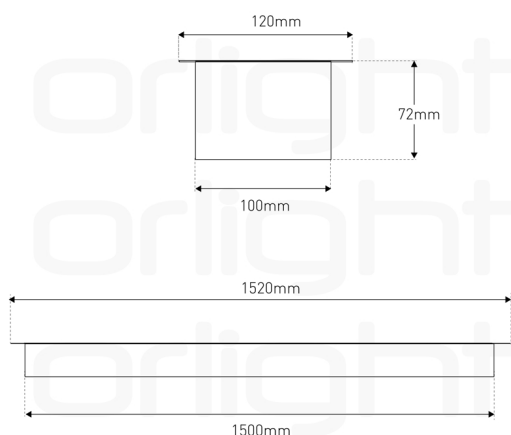

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 25W              |
| Lumen Output         | 3425LM           |
| Efficacy             | 137LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 90°              |
| UGR                  | <16              |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 71V              |
| Milliamp / Current          | 350MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |                  |
|-------------------------------|------------------|
| Installation                  | RECESSED         |
| Construction                  | ALUMINIUM        |
| Length                        | 1520 MM          |
| Width / Depth                 | 120 MM           |
| Height                        | 72 MM            |
| Cutout                        | 1500 MM X 100 MM |
| Weight                        | 4.5KG            |
| Diffuser                      | MICROPRISMATIC   |
| Finish                        | WHITE            |
| RAL                           | RAL 9016         |
| IP Rating                     | IP20             |
| IK Rating                     | IK06             |
| Operating Ambient Temperature | -20°C - +40°C    |


## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | INTEGRAL  |

# RC-100-17W/M-WH-4K-1520-DALI

Item No: ORLINE-100 – 34356

## LIGHT DISTRIBUTION



## ADDITIONAL PRODUCT IMAGES



## ADDITIONAL DIMENSIONS

