

Ref:

ORLDOTLED-RND-SF-IP65-BL


Item No: DOTLED IP65 – 14098

orlight[®]
FROM SOURCE TO SITE

Energy efficient high power IP65 2W LED solution for mains/emergency applications. Simple plug and play connection to ease installation. Surface mounted fixture with a Polycarbonate construction. Matte White powder coat finish as standard and a non-maintained battery life of > than 3 hours.



DIMENSIONS

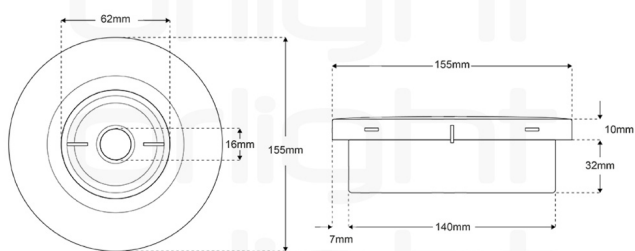

OPTICAL PERFORMANCE

Wattage	2W
Lumen Output	123LM
Efficacy	62LM/W
CCT	6000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	150° CORRIDOR OPTIC
Chipset	BRIDGELUX
Chip Life	L70 > 36,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Driver Configuration	INTEGRAL
Control	SWITCHED-EM

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	155 MM
Height	46 MM
Weight	0.435KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK08

EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS

ORLDOLED-RND-SF-IP65-BL

Item No: DOTLED IP65 – 14098

LIGHT DISTRIBUTION

