

Ref:

AXIAL-130-BL-IP20-25W-4K-DALI

Item No: AXIAL – 32542

orlight[®]
FROM SOURCE TO SITE


Solid-state IP20 surface mounted downlight, meticulously crafted to meet the highest standards of performance and versatility. This fixture is designed for indoor applications, providing an exceptional lighting solution with its sleek black matte finish and supplied with an integral driver. Effortlessly mountable with a BESA box, this downlight offers easy installation and flexibility. For outdoor settings, we also provide an IP65 option, delivering the same impeccable performance with enhanced durability.



UGR
< 19

IP20

DIMENSIONS

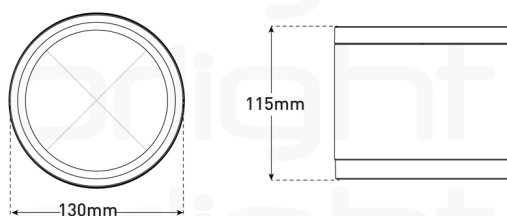

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	2386LM
Efficacy	95LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	36°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	130 MM
Height	115 MM
Weight	0.92KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

AXIAL-130-BL-IP20-25W-4K-DALI

Item No: AXIAL – 32542

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

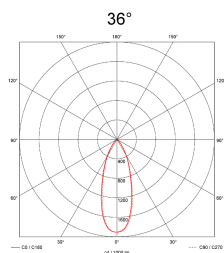

FIXING DETAILS

