


Ref:

CL-RS408-BL-27K-DALI


Item No: CROSSLINE – 10539

orlight[®]
FROM SOURCE TO SITE

Adjustable LED track mounted midi spot constructed from Aluminium and finished in Black RAL9005. This product offers a versatile range of motion with up to 90° tilt on the vertical axis and 360° rotation. Available in 2700K, 3000K and 4000K colour temperature. CRI >90 for light quality assurance.

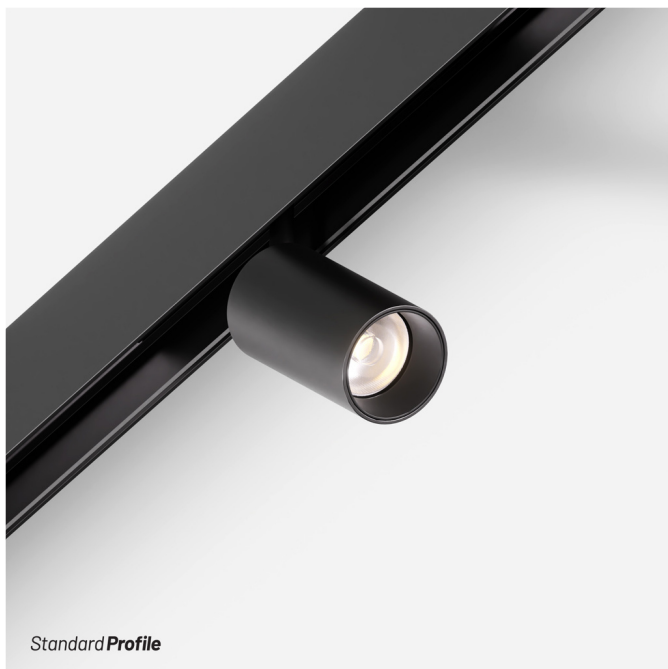

DIMENSIONS

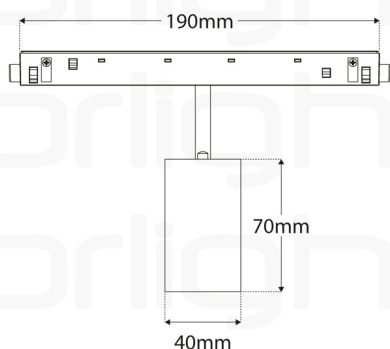

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	783LM
Efficacy	98LM/W
CCT	2700K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	BRIDGELUX
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	48V
Control	DALI DIMMABLE

CONSTRUCTION


Installation	TRACK
Construction	ALUMINIUM
Diameter	40 MM
Length	70 MM
Width / Depth	190 MM
Tilt	90°
Rotation	360°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

CL-RS408-BL-27K-DALI

Item No: CROSSLINE – 10539

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



STANDARD DALI TRACK



CL-ST-BL-2M-DALI

10556

Standard DALI Track

SLIM DALI TRACK



CL-SLT-BL-2M-DALI

10552

Slim DALI Track

CL-RS408-BL-27K-DALI

Item No: CROSSLINE – 10539

orlight[®]
FROM SOURCE TO SITE


RECESSED/TRIMLESS DALI TRACK



CL-RCT-BL-2M-DALI

10527

Recessed/Trimless DALI Track



CL-RCT-BL-3M-DALI

10528

Recessed/Trimless DALI Track