


Ref:

EZ2-100-11W-BL-4K-1-10V


Item No: EZENTIAL – 17830

orlight[®]
FROM SOURCE TO SITE

Ezential-2-100 Solid State fixture combines advance thermal management with a 2835 SMD Samsung chipset to enable superior performance. Aluminium construction to IP54 with opal diffuser for glare reduction. A single chipset ensures uniformity of the light beam with a CRI>80 light quality assurance. Available in combination with 1-10V and DALI dimmable Power Supplies. Please Note: This product does not support hot plugging. Orlight does not recommend cutting of holes prior to receipt of product in hand.

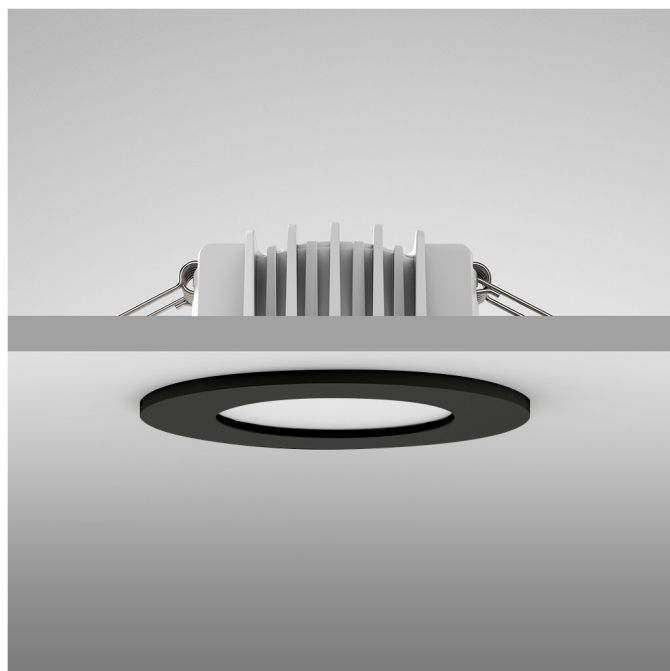

DIMENSIONS

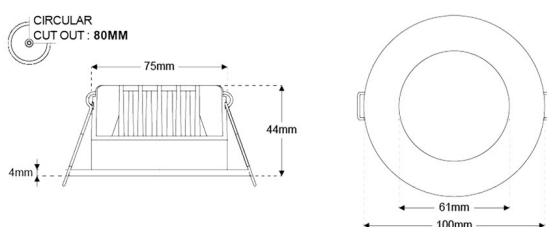

OPTICAL PERFORMANCE

Wattage	11W
Lumen Output	1276LM
Efficacy	116LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	115°
Chipset	SAMSUNG 2835 SMD
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	32-38V
Milliamp / Current	250MA
Driver Configuration	REMOTE
Control	1-10V

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	100 MM
Height	44 MM
Cutout	80 MM
Weight	0.22KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP54

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

EZ2-100-11W-BL-4K-1-10V

Item No: EZENTIAL – 17830

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

