

Ref:

ORLLUNAR-V2-1M-FL-3000K


Item No: LUNAR – 30509

orlight[®]
FROM SOURCE TO SITE

This sleek LED architectural light bollard creates a dramatic lighting effect for urban, residential, hospitality, retail and commercial applications. Constructed from die cast aluminium in a anthracite grey colour finish and rated to IP66. Available in 3000K offering a uniform and even light distribution.



DIMENSIONS

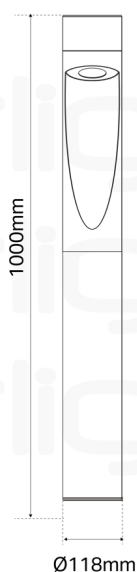

OPTICAL PERFORMANCE

Wattage	15W
Lumen Output	1050LM
Efficacy	70LM/W
CCT	3000K
Beam Angle	130°
Chipset	5050 SMD
Chip Life	L70 > 100,000HRS

ELECTRICAL

Voltage	100-240V
Milliamp / Current	450MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	DIE CAST ALUMINIUM
Diameter	118 MM
Length	1000MM
Finish	ANTHRACITE GREY
RAL	RAL 9007
IP Rating	IP66
IK Rating	IK09