

Ref:

SOLSTICE-MINI-8W-WH-4K

Item No: SOLSTICE – 45030

orlight[®]
FROM SOURCE TO SITE

High-performance solid-state adjustable LED downlight with high CRI for accurate colour rendering. Featuring a compact aluminium body, matte white finish and low-glare optics for precise directional lighting.



NEW!


COMING SOON

DIMENSIONS

SOLSTICE-MINI



350° Rotation

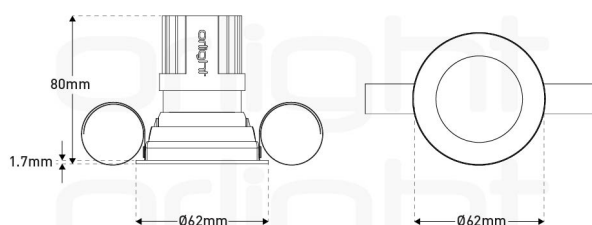

OPTICAL PERFORMANCE

Wattage	8W
Lumen Output	952LM
Efficacy	119LM/W
CCT	4000K
CRI	CRI > 95
Binning	2 STEP MACADAMS
Beam Angle	12°/ 24°/ 36°/ 55°
Chipset	BRIDGELUX

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Milliamp / Current	200MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	62 MM
Height	80 MM
Cutout	55 MM
Tilt	30°
Rotation	350°
Finish	MATT WHITE
RAL	RAL 9010
IP Rating	IP54

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE