

Ref:

# CAPELLA-BL-3000K


Item No: 10398

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Flat mounted pillar light is constructed from glass rods enclosed within two metal end caps and rated to IP44. Available in satin brass, chrome, bronze and black finishes. Ideal for adding light around mirrors or as additional lighting in a bathroom environment. Note: Remote driver supplied with fixture.



## DIMENSIONS

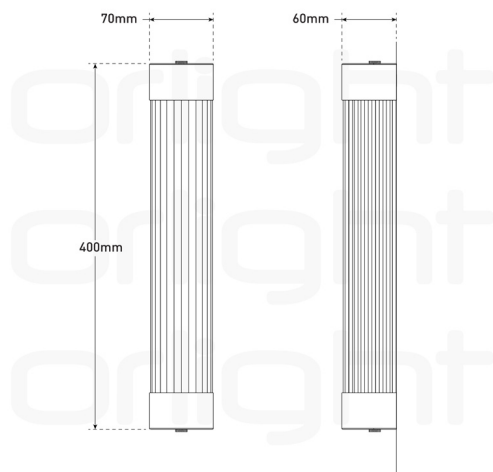

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 4W              |
| Lumen Output | 390LM           |
| Efficacy     | 98LM/W          |
| CCT          | 3000K           |
| CRI          | CRI > 80        |
| Beam Angle   | 120°            |
| Chipset      | 2835 LED        |
| Chip Life    | L70 > 54,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 240V             |
| Milliamp / Current          | 350MA            |
| Driver Configuration        | REMOTE           |
| Control                     | SWITCHED         |


## CONSTRUCTION

|                               |                   |
|-------------------------------|-------------------|
| Installation                  | WALL MOUNTED      |
| Construction                  | ALUMINIUM & GLASS |
| Length                        | 70 MM             |
| Width / Depth                 | 60 MM             |
| Height                        | 397 MM            |
| Weight                        | 1.21KG            |
| Finish                        | BLACK             |
| IP Rating                     | IP44              |
| Operating Ambient Temperature | -20°C ~ +50°C     |
| Lamp Change                   | SOLID STATE LED   |

# CAPELLA-BL-3000K

Item No: 10398

## LIGHT DISTRIBUTION



## FIXING DETAILS

