

Ref:

ORLTL-R-WH-15W-4000K


Item No: ORLTL – 15575

orlight[®]
FROM SOURCE TO SITE

Track lighting system combining advanced thermal management with a CREE CXA1512 LED chipset for enhanced performance. Versatile range of motion — 60° on the vertical axis and 360° rotation — for direction of light to application. Single chipset for beam uniformity, with interchangeable optics (24°, 38° and 60°). CRI >95, 2-Step MacAdams Ellipse binning for colour consistency. Up to 1100 Lumen output and integrated mains dimmable option.



DIMENSIONS

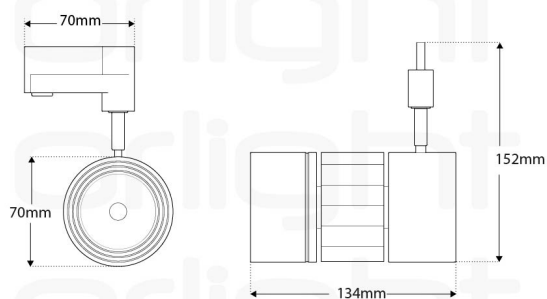

OPTICAL PERFORMANCE

Wattage	15W
Lumen Output	1493LM
Efficacy	100LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	24° / 38° / 60°
Chipset	CREE CXA1512
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-250V
Milliamp / Current	16AmA
Driver Configuration	INTEGRAL
Control	MAINS DIMMABLE


CONSTRUCTION

Installation	TRACK
Construction	ALUMINIUM
Diameter	70 MM
Length	134 MM
Width / Depth	70 MM
Height	152 MM
Weight	1.005KG
Tilt	60°
Rotation	360°
Finish	WHITE
RAL	RAL 9003
IP Rating	IP20

ORLTL-R-WH-15W-4000K

Item No: ORLTL – 15575

LIGHT DISTRIBUTION

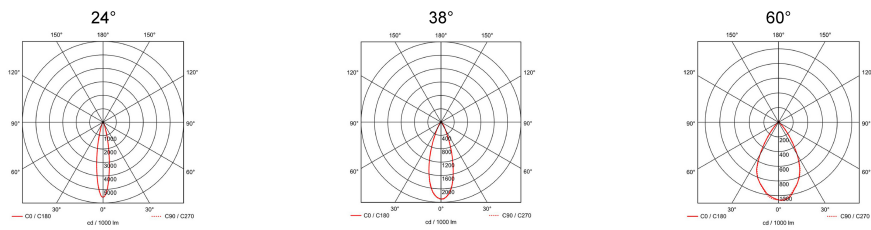

COMPATIBLE TRACKS



ORLTL-TRACK-WH-1M
15588
ORLTL Standard Track



ORLTL-TRACK-WH-2M
15589
ORLTL Standard Track



ORLTL-TRACK-WH-3M
15591
ORLTL Standard Track