

Ref:

ORLCB-AW-9010

Item No: ORLCB – 13990

orlight[®]
FROM SOURCE TO SITE

Trimless architectural downlight, with aluminium construction and clip-in fixing mechanism. Recessed light source serves to minimise glare with 360 degree rotation and tilt facility. Orlight does not recommend cutting of holes prior to receipt of product in hand.



OPTICAL PERFORMANCE


LOR	82
-----	----

CONSTRUCTION


Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	60 MM
Height	54 MM
Cutout	75 MM
Weight	0.138KG
Tilt	30°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9010
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	CLIP MECHANISM

DIMENSIONS

ADDITIONAL DIMENSIONS

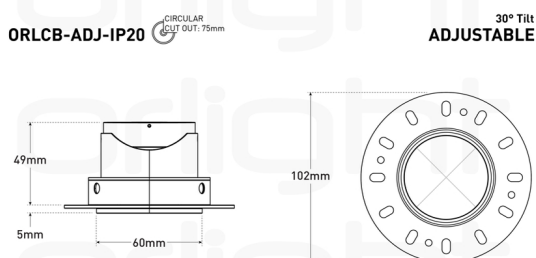

ORLCB-ADJ-IP20 with **LED ENGINES** CIRCULAR CUT OUT: 75mm **ADJUSTABLE - 30° Tilt**
Allow +5mm for Cable Clearance



ORLCB-AW-9010

Item No: ORLCB – 13990

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999




DB11-R999



DB13-R999

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre