

Ref:

# AXIAL-90-BL-IP20-10W-4K-DALI-B-EM

Item No: AXIAL – 32569

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE


Solid-state IP20 surface mounted downlight designed for indoor use, with a black matte finish, supplied with a remote driver and a remote emergency driver with battery pack. Mounts easily using a BESA box for flexible installation. An IP65 variant is also available for outdoor use.



UGR  
< 19

IP20

## DIMENSIONS

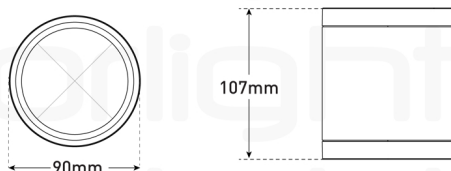

## OPTICAL PERFORMANCE

|                      |                     |
|----------------------|---------------------|
| Wattage              | 10W                 |
| Lumen Output         | 1018LM              |
| Efficacy             | 102LM/W             |
| CCT                  | 4000K               |
| CRI                  | CRI > 80            |
| Binning              | 2 STEP MACADAMS     |
| Beam Angle           | 36°                 |
| UGR                  | UGR < 19            |
| Chipset              | CITIZEN LED CHIPSET |
| Calculated Chip Life | L70 > 105,000HRS    |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 200-240V         |
| Milliamp / Current          | 200MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SURFACE       |
| Construction                  | ALUMINIUM     |
| Diameter                      | 90 MM         |
| Height                        | 107 MM        |
| Weight                        | 0.7KG         |
| Tilt                          | FIXED         |
| Finish                        | BLACK         |
| RAL                           | RAL 9005      |
| IP Rating                     | IP20          |
| IK Rating                     | IK08          |
| Operating Ambient Temperature | -20°C - +40°C |

## EMERGENCY


|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | REMOTE         |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 305LM          |

# AXIAL-90-BL-IP20-10W-4K-DALI-B-EM

Item No: AXIAL – 32569

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION

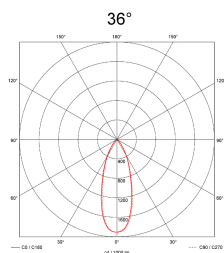

## FIXING DETAILS

