


Ref:

# ORL-X14U-WH-3K-MS-EM


Item No: ORLX14 – 35155

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

High Powered IP65 rated fixture with polycarbonate construction and anti-glare diffuser. Integral control gear, with CRI>80 to ensure light quality. Side conduit entry points and twist / lock mechanism diffuser for ease of installation and maintenance.

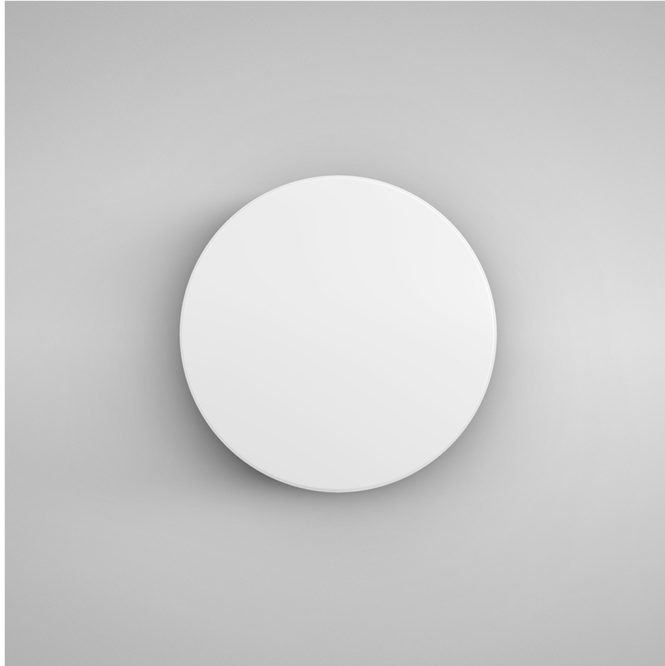

## DIMENSIONS

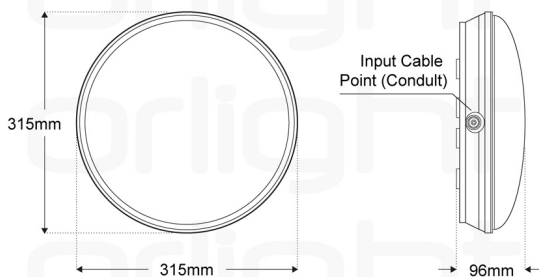

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 20W              |
| Lumen Output         | 2280LM           |
| Efficacy             | 114LM/W          |
| CCT                  | 3000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 120°             |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                     |
|-----------------------------|---------------------|
| Constant Current or Voltage | CONSTANT CURRENT    |
| Voltage                     | 200-240V            |
| Milliamp / Current          | 520MA               |
| Driver Configuration        | INTEGRAL            |
| Control                     | MICROWAVE SENSOR-EM |

## CONSTRUCTION

|                               |               |
|-------------------------------|---------------|
| Installation                  | SURFACE       |
| Construction                  | ALUMINIUM     |
| Diameter                      | 315 MM        |
| Height                        | 96 MM         |
| Finish                        | WHITE         |
| RAL                           | RAL 9016      |
| IP Rating                     | IP65          |
| IK Rating                     | IK06          |
| Operating Ambient Temperature | -20°C - +45°C |

## EMERGENCY


|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | INTEGRAL       |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 343LM          |

# ORL-X14U-WH-3K-MS-EM

Item No: ORLX14 – 35155

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## FIXING DETAILS

