

Ref:

SHIELD-1500-WH-4K-DALI


Item No: SHIELD – 35100

orlight[®]
FROM SOURCE TO SITE

Vandal resistant corner mount surface fixture, expertly crafted from durable sheet steel. This fixture boasts an exceptional IK10++ impact resistance rating, ensuring unparalleled durability. With an IP65 rating, this fixture provides superior protection against dust and water, making it suitable for indoor and outdoor covered applications.



DIMENSIONS

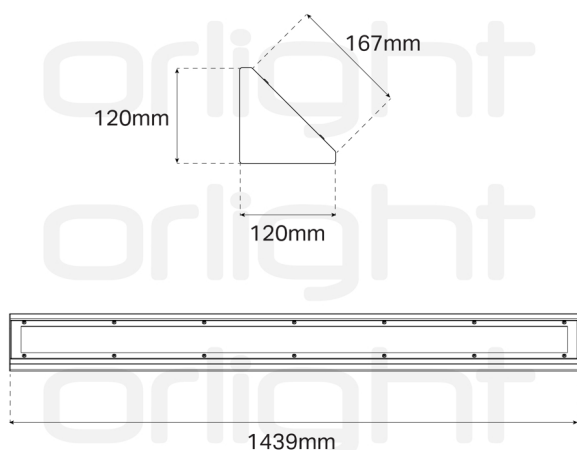

OPTICAL PERFORMANCE

Wattage	31W
Lumen Output	4278LM
Efficacy	138LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	800MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	SHEET STEEL
Length	1439 MM
Width / Depth	120 MM
Height	120 MM
Weight	8.65KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK10++
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	INTEGRAL

SHIELD-1500-WH-4K-DALI

Item No: SHIELD – 35100

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES

