

Ref:

STEAMSPOT-FG-SC-240V

Item No: STEAM – 17019

orlight[®]
FROM SOURCE TO SITE

The Steamspot fixture features minimalistic styling combined with IP65 construction. 72mm diameter for discreet installation. A frosted diffuser serves to minimise glare. Standard GU10 lamp holder included. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report here. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	78
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	72 MM
Height	30 MM
Cutout	65 MM
Weight	0.103KG
Tilt	FIXED
Finish	SATIN CHROME
IP Rating	IP65
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

STEAMSPOT



FIXED

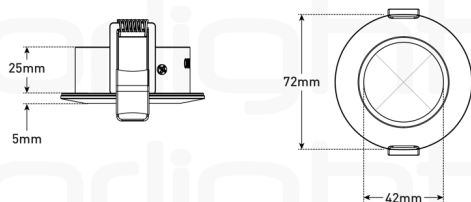


STEAMSPOT-FG-SC-240V

Item No: STEAM – 17019

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

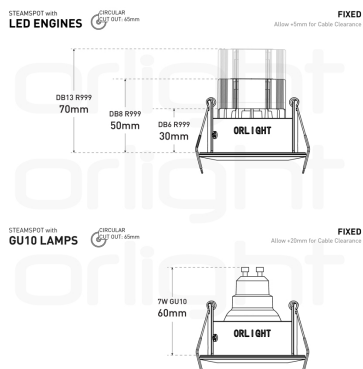

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

STEAMSPOT-FG-SC-240V

Item No: STEAM – 17019

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-SL-WL
11901
Slim Spring Mains Converter for Orlight Classic,
Twist & Lock & Shower series.