


Ref:

ORL-X14U-WH-3K-DALI-B-EM


Item No: ORLX14 – 30362

orlight[®]
FROM SOURCE TO SITE

High Powered IP65 rated fixture with polycarbonate construction and anti-glare diffuser. Integral control gear, with CRI>80 to ensure light quality. Side conduit entry points and twist / lock mechanism diffuser for ease of installation and maintenance.

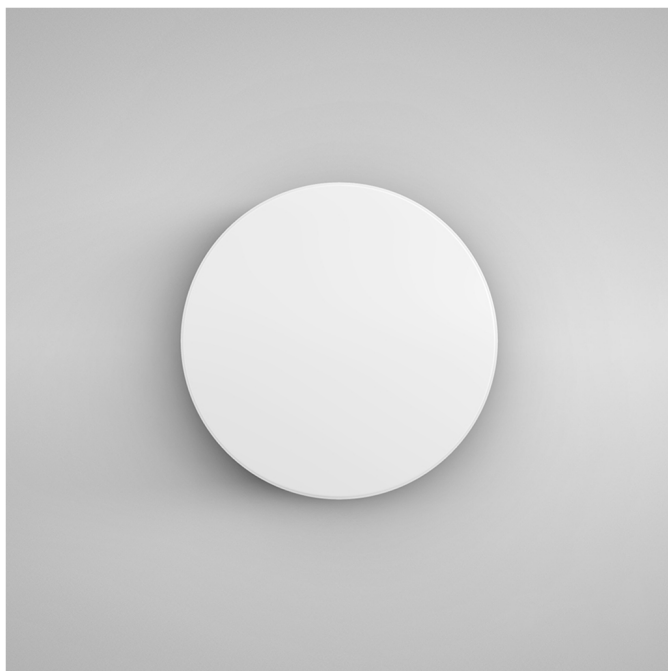

DIMENSIONS

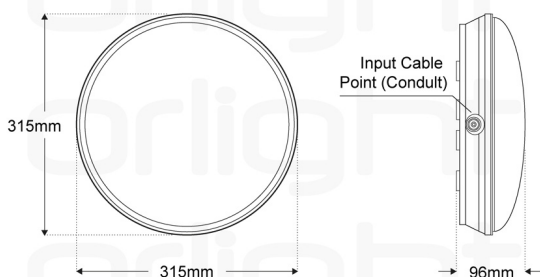

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2280LM
Efficacy	114LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	520MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	315 MM
Height	96 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-20°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	343LM

ORL-X14U-WH-3K-DALI-B-EM

Item No: ORLX14 – 30362

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

