


Ref:

ORLLED1260-45W-4K-9016-DALI-B-EM

Item No: PANEL – 28763

orlight[®]
FROM SOURCE TO SITE


Solid State LED Panel Light 1200x600. Matt White finished Aluminium surrounded with PMMA diffuser. Low energy solution for office and commercial applications. Offering benefits such as instant start, no flickering, silent running and no maintenance. This luminaire is suitable for lay-in ceiling grids (T15 & T24) installations or suspension applications. Please Note: This product does not support hot plugging.

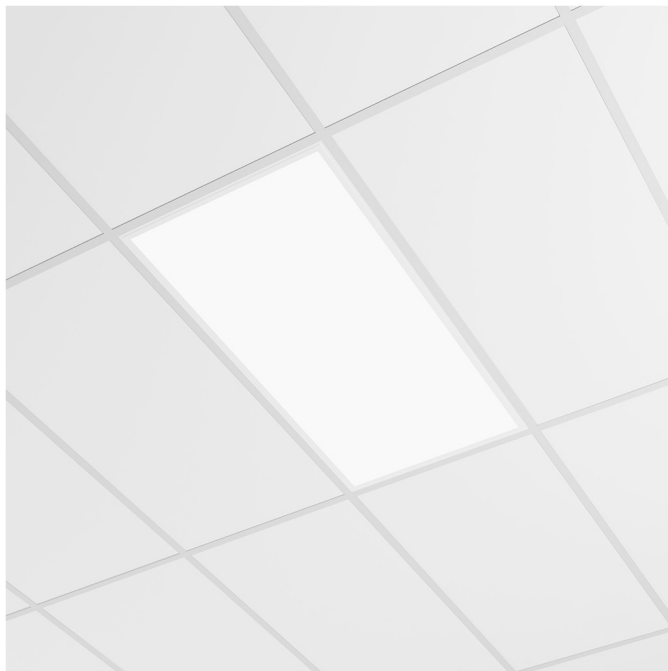

UGR
< 19

IP20

DIMENSIONS

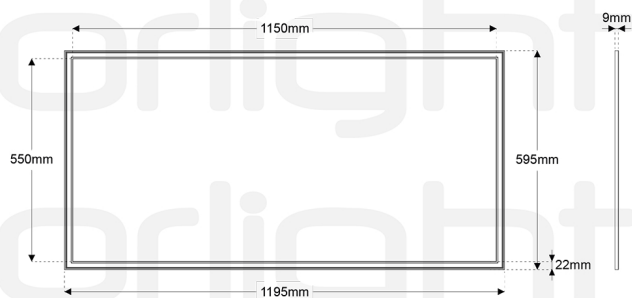

OPTICAL PERFORMANCE

Wattage	45W
Lumen Output	4545LM
Efficacy	101LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	SMD 2835 LED
Chip Life	L70 > 93,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	110-240V
Milliamp / Current	1050MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	CEILING RECESSED
Construction	ALUMINIUM
Length	1150 MM
Width / Depth	595 MM
Height	9 MM
Weight	6KG
Diffuser	MICROPRISMATIC
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20


EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	304LM

ORLLED1260-45W-4K-9016-DALI-B-EM

Item No: PANEL – 28763

LIGHT DISTRIBUTION



SUSPENSION KIT



SUS-KIT-PANEL-GP
17047
Suspension Kit Gripper



SUS-KIT-LOOP
17041
Suspension Kit Loop