

Ref:

ULTRA-4L-25W-WH-3K4K-DALI-B-EM

Item No: ULTRA LOUVRE – 35532

orlight[®]
FROM SOURCE TO SITE

Our Ultra Louvre fixtures combine classic style with modern functionality, featuring a louvre cover and UGR19-rated optics for glare-free lighting. Designed for versatility, they can be surface mounted or suspended, and offer switchable colour temperatures from 3000K to 4000K. These fixtures provide both aesthetic appeal and practical lighting solutions for various commercial settings.




UGR
< 19

SWITCHABLE
CCT

IP20

DIMENSIONS

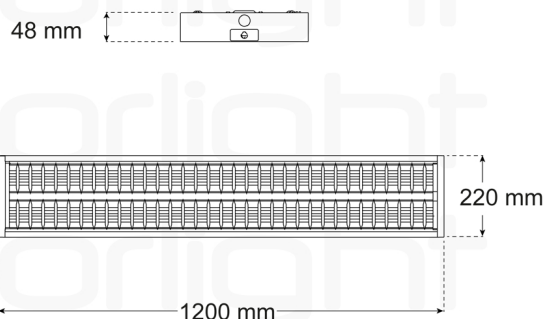

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	3475LM / 3600LM
Efficacy	139LM/W / 144LM/W
CCT	3000K/4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	90°
UGR	UGR < 19
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	250MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	220 MM
Height	48 MM
Weight	3.86KG
Finish	WHITE
RAL	RAL 9003
IP Rating	IP20
IK Rating	IK06
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	418LM / 433LM

ULTRA-4L-25W-WH-3K4K-DALI-B-EM

Item No: ULTRA LOUVRE – 35532

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

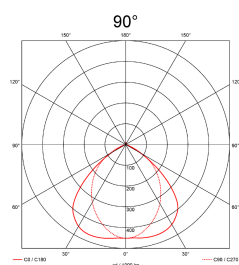

ADDITIONAL PRODUCT IMAGES



SUSPENSION KIT



ULTRA-SUS-KIT/ULTRA-L-SUS-KIT-1M

41236

Ultra Suspension Kit