

Ref:

ORLLM44-1-SS-3000K


Item No: CRESCENT - MINI – 14940

orlight[®]
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package and 30 degree beam option. Marine Grade 316 Stainless Steel with construction rated to IP68 & Eye-Lid design for asymmetric light emission. Product footprint of 44mm diameter ensures versatile application. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.



DIMENSIONS

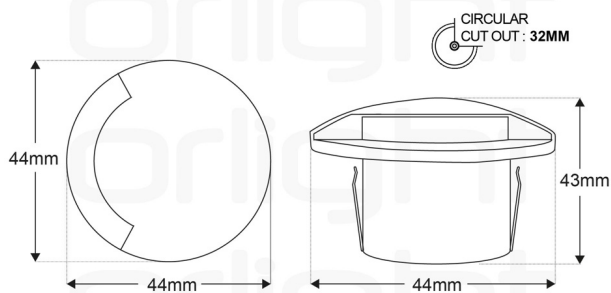

Cable Length: 1100mm

OPTICAL PERFORMANCE

Wattage	1W
Lumen Output	35LM
Efficacy	35LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	30°
Chipset	CREE 5050
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	3V
Milliamp / Current	350MA
Driver Configuration	REMOTE
Cable Length	1100MM


CONSTRUCTION

Installation	RECESSED
Construction	STAINLESS STEEL
Diameter	44 MM
Height	43 MM
Cutout	32 MM
Weight	0.14KG
Finish	316 MARINE GRADE
IP Rating	IP68
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

ORLLM44-1-SS-3000K

Item No: CRESCENT - MINI – 14940

LIGHT DISTRIBUTION



DRIVER CONFIGURATION

CONTROL	IP RATING	DRIVER	CODE	MIN. FITTING	MAX. FITTING
Switched	IP68	ORLRPV350CC	15231	1	8
Switched	IP42	ORLRPV350-35-APC	15230	10	30
Switched	IP66	ORLRPV350-35-APC-IP66	31555	10	30
Mains	IP20	ORLRPV20D-350MA	46595	1	13
1-10V/Push	IP20	MAXDR-MINI-350MA	22251	1	15
DALI	IP20	ORL-DALI-NFC-15CC-350MA	34715	2	13

PLEASE NOTE:

This product does not support hot plugging

SWITCHED (IP42)



ORLRPV350-35-APC
15230
Constant current 350mA Driver

SWITCHED (IP66)



ORLRPV350-35-APC-IP66
31555
Constant current 350mA Driver

ORLLM44-1-SS-3000K

Item No: CRESCENT - MINI – 14940

orlight[®]
FROM SOURCE TO SITE

SWITCHED (IP68)



ORLRPV350CC

15231

Constant current 350mA Driver

MAINS (IP20)



ORLRPV20D-350MA

46595

Mains Dimmable Driver

1-10V/PUSH DIM (IP20)



MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

DALI (IP20)



ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI Driver

ORLLM44-1-SS-3000K

Item No: CRESCENT - MINI – 14940

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



ACCLMTS119

10308

Inground Tube for LM44 Range