

Ref:

AQUASPOT-FG-CH-240V

Item No: AQUA – 10351

orlight
FROM SOURCE TO SITE

Architectural downlight featuring an anti-glare baffle and recessed light source to minimise glare. Discreet application with reduced trim bezel. Construction rated to IP65 incorporating a frosted internal diffuser. Standard GU10 lamp holder included. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report [here](#). Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	72
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	80 MM
Height	33 MM
Cutout	72 MM
Weight	0.09KG
Tilt	FIXED
Finish	CHROME
IP Rating	IP65
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

AQUASPOT

CIRCULAR
CUT OUT: 72mm

FIXED

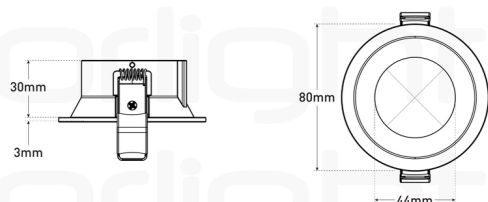


AQUASPOT-FG-CH-240V

Item No: AQUA – 10351


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

AQUASPOT with **LED ENGINES**  CIRCULAR
CUT OUT: 72mm **FIXED**
Allow +5mm for Cable Clearance

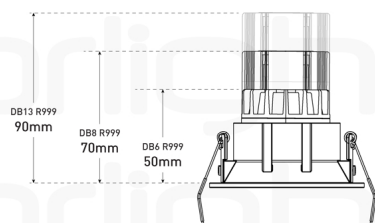

AQUASPOT with **GU10 LAMPS**  CIRCULAR
CUT OUT: 72mm **FIXED**
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

AQUASPOT-FG-CH-240V

Item No: AQUA – 10351

orlight[®]
FROM SOURCE TO SITE




DB13-R999

ACCESSORIES



MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



MC2-SL

11911
Slim Spring Mains Converter for Orlight
Magnetic series