

Ref:

RADIUS-WH-4000K-DALI-B-EM


Item No: RADIUS – 35434

orlight[®]
FROM SOURCE TO SITE

Corner fixture featuring Aluminium construction finished in White RAL9016 and opal diffuser. Integral LED Driver with configurations to accommodate 1-10V, DALI control methods and emergency options.



DIMENSIONS

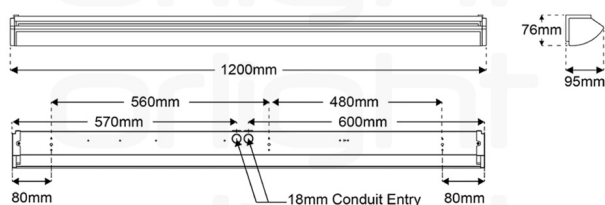

OPTICAL PERFORMANCE

Wattage	44W
Lumen Output	4620LM
Efficacy	105LM/W
CCT	4000K
CRI	CRI > 80
Beam Angle	120°
Chipset	SMD 2835 LED

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	850MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	95 MM
Height	76 MM
Weight	2KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-40°C - +40°C

EMERGENCY

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	324LM

RADIUS-WH-4000K-DALI-B-EM

Item No: RADIUS – 35434

LIGHT DISTRIBUTION

