

Ref:

AXIAL-130-BL-IP20-25W-3K-DALI-B-EM

Item No: AXIAL – 32534

orlight[®]
FROM SOURCE TO SITE


Solid-state IP20 surface mounted downlight designed for indoor use, with a black matte finish, supplied with an integral driver and a remote emergency driver with battery pack. Mounts easily using a BESA box for flexible installation. An IP65 variant is also available for outdoor use.



UGR
< 19

IP20

DIMENSIONS

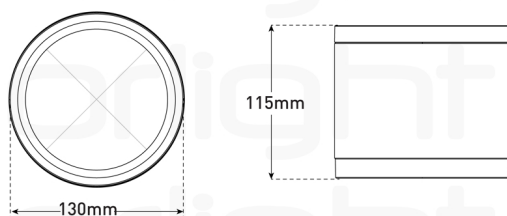

OPTICAL PERFORMANCE

Wattage	25W
Lumen Output	2380LM
Efficacy	95LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	36°
UGR	UGR < 19
Chipset	CITIZEN LED CHIPSET
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	130 MM
Height	115 MM
Weight	0.92KG
Tilt	FIXED
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20
IK Rating	IK08
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	286LM

AXIAL-130-BL-IP20-25W-3K-DALI-B-EM

Item No: AXIAL – 32534

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

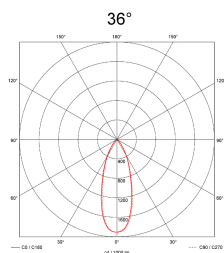

FIXING DETAILS

