


Ref:

CL-ST-BL-2M-DALI

Item No: CROSSLINE – 10556

orlight[®]
FROM SOURCE TO SITE

The Standard DALI Track is designed for Orlight's CROSSLINE range. Crafted with precision from durable aluminium, this track is elegantly finished in Black RAL9005. The magnetic strip ensures a secure placement for Power Feeds and Flexible Continuous Connectors. Whether surface mounted or suspended, Orlight's versatile mounting kits facilitate easy installation. Note: For all straight tracks of the CROSSLINE range, END CAPS are required at BOTH ENDS, even when using 'L' shape Connectors.

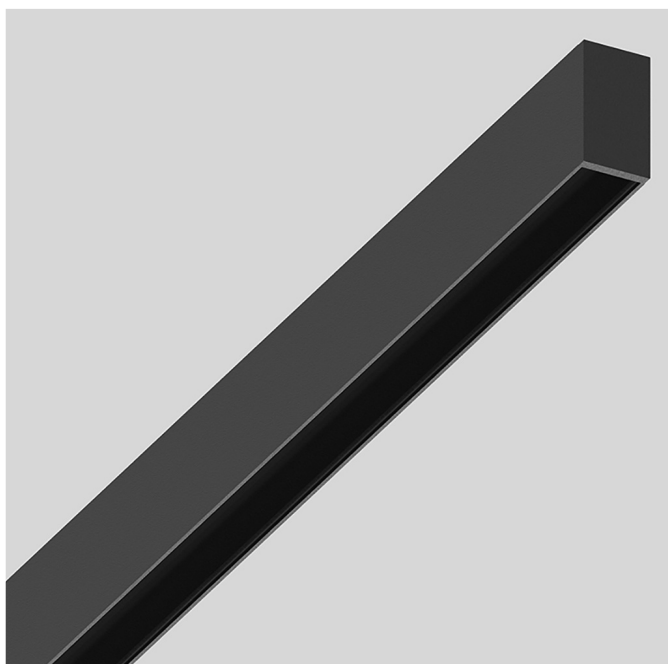


ELECTRICAL

Voltage	48V
Control	DALI DIMMABLE

CONSTRUCTION

Installation	TRACK
Construction	ALUMINIUM
Length	2000 MM
Width / Depth	26 MM
Height	52 MM
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

DIMENSIONS

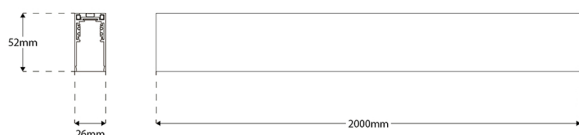

CL-ST-BL-2M-DALI

Item No: CROSSLINE – 10556

orlight[®]
FROM SOURCE TO SITE

POWER FEED



CL-BL-PF-500MM-DALI
17743
Power Feed With 500mm Cable



CL-BL-PF-2000MM-DALI
17746
Power Feed With 2000mm Cable


CONNECTORS



CL-ST-BL-LVC
17760
Vertical "L" Shape Connector Kit



CL-ST-BL-LHC
17759
Horizontal "L" Shape Connector Kit

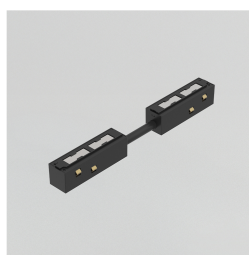

CL-BL-FC-DALI
17742
Flexible Continuous Connector



CL-BL-MLC
17739
Mechanical Linear Connector

END CAPS




CL-ST-BL-EC
10557
Recessed End Caps

SUSPENSION KIT



CL-SUS-JB-BL-KIT
10562
Suspension Kit

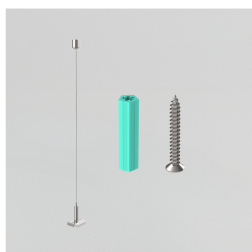

CL-SUS-BL-KIT
10560
Suspension Kit

CL-ST-BL-2M-DALI

Item No: CROSSLINE – 10556

orlight[®]
FROM SOURCE TO SITE

SWITCHED DRIVER (REMOTE)



ORLRPV48-150-HLG-A
15247
48V Switched Driver



ORLRPV48100
15246
48V Switched Driver