

Ref:

CIT22-WH-4000K


Item No: CIT – 10475

orlight[®]
FROM SOURCE TO SITE

Adjustable solid state fixture with integrated Citizen chipset. Slim product profile allows for installation applications with as little as 30mm recessed depth. A 2-Step MacAdams binning strategy ensures colour consistency with single chip technology providing a consistent beam. Configured to 40 degree beam as standard. Available in combination with Mains Dimmable, 1-10V and DALI dimmable Power Supplies.



DIMENSIONS

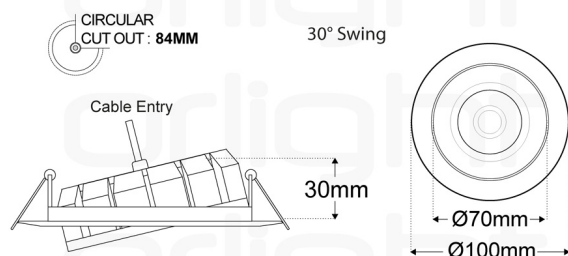

OPTICAL PERFORMANCE

Wattage	10W
Lumen Output	980LM
Efficacy	98LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	40°
Chipset	CITIZEN LED CHIPSET
Chip Life	L80 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	230MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	100 MM
Height	30 MM
Cutout	84 MM
Weight	0.29KG
Tilt	30°
Rotation	360°
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

CIT22-WH-4000K

Item No: CIT – 10475

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



SWITCHED/MAINS DIMMABLE DRIVER



DOMINO-250MA-DR-DIM

21973

Switched & Mains Dimmable Driver

1-10V/DALI DRIVER (SET TO 220MA)



MAXDR-MINI-100-380MA

11887

Mini 1-10V/DALI & Push Dimming Driver