

Ref:

ORLRPVHSEVOPL2-S-2M

Item No: PROTRIM PLUS – 15346

orlight[®]
FROM SOURCE TO SITE

Square profile dedicated to the Orlight linear solutions. The profile features an Aluminium construction ideal for heat dissipation with frosted diffuser to eliminate LED trail. Available with fixing clip mechanism with 3M foam based adhesive for ease of installation.




OPTICAL PERFORMANCE

LOR	60
-----	----

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM & OPAL
Length	2000 MM
Width / Depth	26 MM
Height	23 MM
Finish	ALUMINIUM
IP Rating	IP20

DIMENSIONS

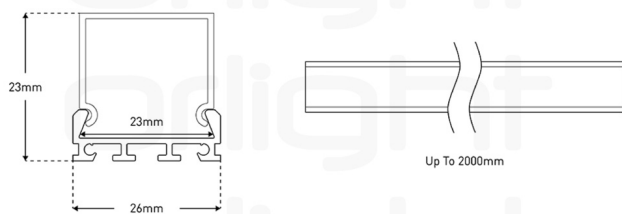


ORLRPVHSEVOPL2-S-2M

Item No: PROTRIM PLUS – 15346

orlight[®]
FROM SOURCE TO SITE

EVO4



IP RATED

EVO4-PLUS



EVO4+ CRI90