


ORL1582


Installation Instructions

Dimensions

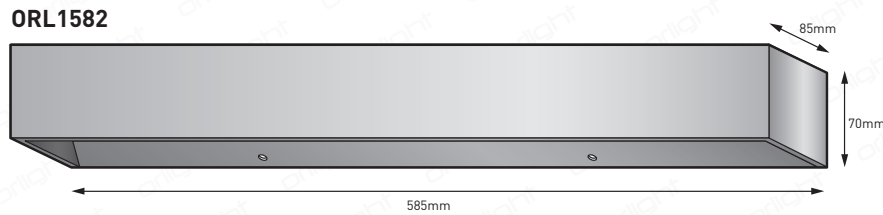

Installations

NOTE - Orlight does not recommend cutting of holes or drilling holes prior to receipt of product in hand.

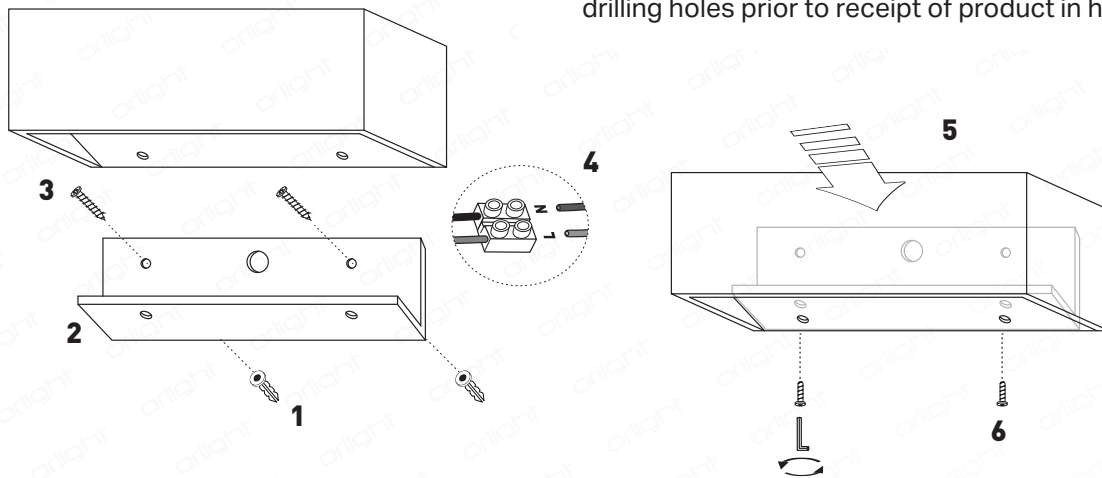

Step 1 – Mark the Installation Position

Measure and mark the exact position where the unit is to be installed. Use a level to ensure accuracy. Remove the base plate from the unit by undoing the two socket cap screws (refer to point 6) using the Allen key provided.

Step 2 – Prepare the Mounting Surface

Select the appropriate fixing anchors based on your wall type. Basic anchors are supplied; however, these may need to be replaced with more suitable fixings depending on the installation surface. Mark and drill holes for the anchors as required.

Step 3 – Secure the Base Plate

Position the base plate (2) against the marked area and secure it firmly to the wall using the provided screws (3) and anchors. Ensure the base plate is level and tightly fixed.

Step 4 – Electrical Connection

Connect the mains supply cables to the terminal block (4) as follows:

L – Live (Brown)

N – Neutral (Blue)

E – Earth (Green/Yellow)

Ensure all connections are secure, and no bare wires are exposed. Only a qualified electrician should perform electrical connections.

Step 5 – Attach and Secure the Main Unit

Align the main unit (5) with the secured base plate and slide it into position. Secure the unit to the base plate using the two socket cap screws (6).

Note: The socket screws are accessed from the bottom of the unit.

Step 6 – Final Check and Power On

Once the fixture is securely mounted and wiring is complete, restore power to the circuit. Test the fitting to ensure correct operation and check that all parts are firmly secured.

Additional Information

We recommend that this product is installed by a competent person in accordance with the latest edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the job or installation.

For more information and installation guide lines please refer to "Guide on Lighting Risks and Regulations" which can be downloaded from the website:

http://media.orlight.com/media/downloads/Orlight_guide_on_lighting_risks.pdf


Wiring

Disconnect the mains supply before installation. Connect the mains to the terminal block provided

Colour Codes

Black = Blue

Red = Brown



Ensure that the unit is installed and maintained by a certified professional and that installation conforms to any local building control standard applicable. Connect the mains supply to the integral driver where input connection points are marked.

* Please note, all information contained within this instruction manual is provided in good faith. We will not be held responsible for any losses incurred as a result of any inaccuracies contained within this document.