

Ref:

ORL1005-CH-NL

Item No: TWIST AND LOCK – 12829

orlight[®]
FROM SOURCE TO SITE

The fixed Twist & Lock series feature a minimalistic design created to be unobtrusive and subtle in-situ. The twist and lock mechanism with retaining ring allows for simple lamp change. Suitable for 50mm retrofit light sources. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	95
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	80 MM
Height	32 MM
Cutout	70 MM
Weight	0.052KG
Tilt	FIXED
Finish	CHROME
IP Rating	IP20
Compatible Light Source	GU10
Lamp Change	TWIST & LOCK


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL1005-IP20



FIXED

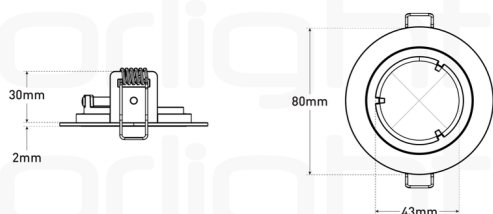

ORL1005-CH-NL


Item No: TWIST AND LOCK – 12829

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL1005-IP20 with GU10 LAMPS  **FIXED**

Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

ACCESSORIES



MC1-SL-WL

11901

Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



MC1

11894

Standard Mains Converter